

OFFICE COPY HOLD

THIRD ORDER LEVELS
SEA LEVEL DATUM OF 1929


UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

42-092-11
SUMNER QUADRANGLE
216 - IOWA
N4245-W9200/15
DIAGRAM NK 15-5
WATERLOO

Chickasaw, Bremer and
Fayette Counties

Edition of: 3-1-78

PR:ADP/ob

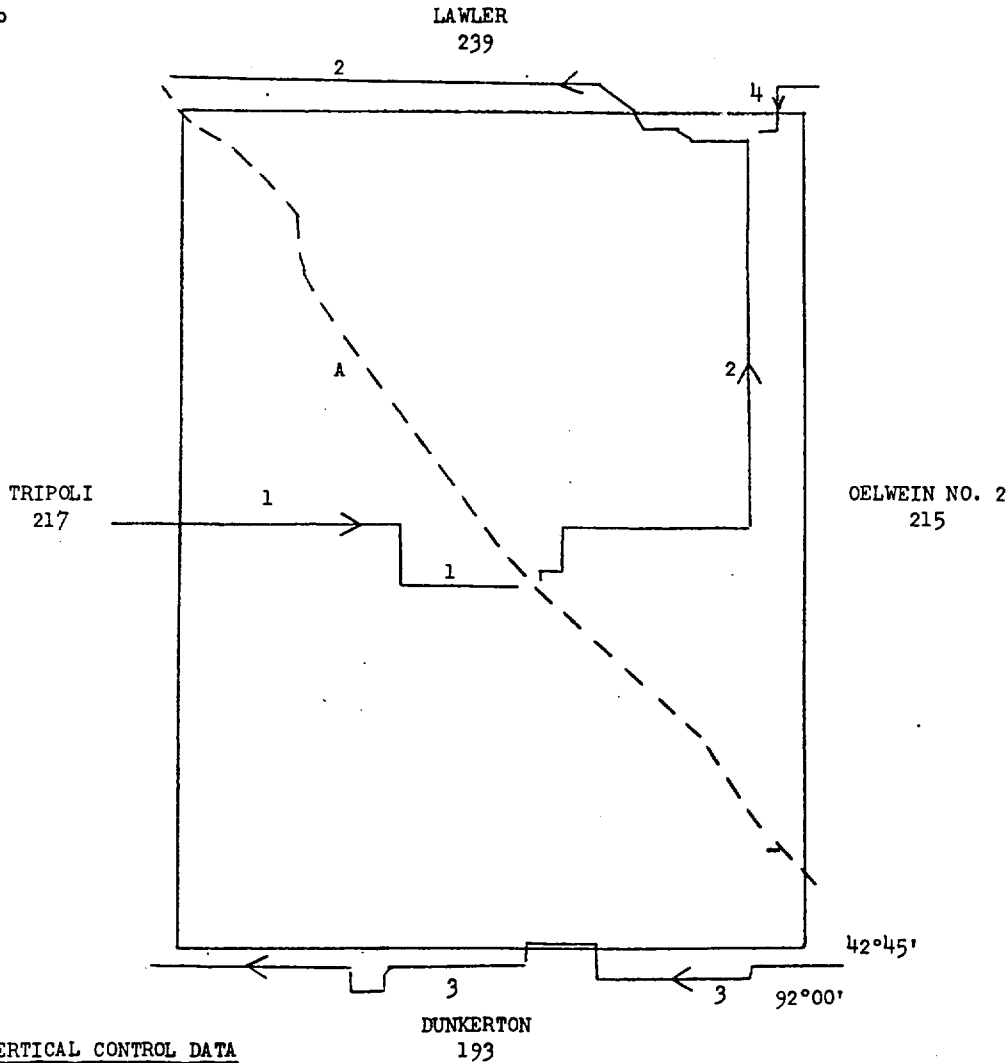

USC&GS VERTICAL CONTROL DATA
A. Quadrangle 420921

216 B

LINE 1

FEET

C. L. Crutchfield, 1969; Book CV 2490

TRIPOLI QUAD. - 217

2 27 16.1 Fredericka, 0.5 mi S. and 1.8 mi E. of, 0.3 mi E. of the cor.secs.
8, 9, 16 and 17, T. 93 N., R. 12 W., 14 ft N. and 1.4 ft lower than center
of E.-W. County Hwy. "K" at a small draincrossing, in the center of the N.
headwall of a concrete box culvert; a standard tablet stamped "48 CLC
1969 1067" 1067.376

28 16.8 UE 48 A, 0.7 mi E. along a Co. rd. from tablet, 24 ft N. and 18 ft W. and 2.6
ft lower than crossroads, top of the W. end of a metal corrugated culvert; a
punched hole, painted "UE 48 A" 1073.71

SUMNER QUAD. - 216

29 18.0 UE 48 B, 1.9 mi E. along a Co. rd. from tablet, 13 ft N. and 23 ft E. and
2.3 ft lower than center of a small wooden bridge over E.-W. gravel rd. at
an overflow bridge for the main creek, top of the NE. end of the N. 12 x 12
wooden bridge support; a RR. spike, painted "UE 48 B" 1014.59

30 18.3 UE 48 C, 2.2 mi E. along a Co. rd. from tablet, 19 ft N. and 27 ft W. and 2.3
ft lower than T-rd. N., top of the NW. end of a large metal corrugated
culvert; a punched hole, painted "UE 48 C" 1016.02

31 19.3 UE 48 D, 3.2 mi E. along a co. rd. from tablet, center of crossroads; a
RR. spike, painted "UE 48 D" 1072.94

32 19.6 Frederika, 0.3 mi S. and 5.3 mi E. of, 0.3 mi E. of the center of secs.
12 and 13, T. 93 N., R. 12 W., 52 ft N. and 0.7 ft higher than center of E.-W.
gravel rd., 19 ft N. and 6 ft E. of a power pole, in top of a large boulder; a
standard tablet stamped "49 CLC 1969 1052" 1052.493

33 19.8 Reference mark, 960 ft S. of tablet, 11 ft S. and 17 ft E. and 2.1 ft lower
than center of bridge over a small drain, top of the SE. corner, on the S.
side of a 12 x 12 wooden bridge support; a RR. spike painted "RM" 1036.71

34 20.8 UE 49 A, 1.1 mi E. along a county rd. from tablet, 29 ft N. and 31 ft E.
and 1.0 ft lower than crossroads, on the S. side of a power pole; a RR.
spike, painted "UE 49 A" 1101.53

35 21.8 UE 49 B, 1.1 mi E. and 1.0 mi S. along a co. rd. from tablet, 24 ft S.,
4 ft E. and 2.8 ft lower than T-rd. N., on the E. end of a metal corrugated
culvert; a punched hole, painted "UE 49 B" 1092.53

36 23.0 Sumner, 0.8 mi N. and 3.3 mi W. of, 0.2 mi S. of cor. secs. 16, 17, 20 and 21,
T. 93 N., R. 11 W., 130 ft N. and 10 ft E. and 0.6 ft lower than T-rd. E., in
the center of the E. headwall of a concrete box culvert; a standard tablet stamped
"50 CLC 1969 1078" 1078.055

37 23.0 Reference mark, 21 ft W. and 0.2 ft lower than tablet, in the center of the
W. headwall of a concrete bridge culvert; a chiseled square, painted "RM" 1077.82

38 24.0 UE 50 A, 1.0 mi E. along a co. rd. from tablet, center of crossroads; a RR.
spike painted "UE 50 A" 1110.49

39 25.0 UE, center of crossroads, 2.0 mi E. along a co. rd. from tablet 1087.4

40 25.1 UE 50 B, 2.1 mi E. along a co. rd. from tablet, 15 ft S. and 560 ft E. and
11.0 ft lower than center of crossroads, in the center of the S. headwall
of a wooden box culvert; a RR. spike, painted "UE 50 B" 1076.34

41 26.0 Sumner, Bremer County, 1.1 mi NW. along the C. GW. RR. from the station at;
44 ft NE. of milepost 163, at the crossing of a farm rd., 48 ft SE. of the center
of the rd., 37.5 ft NE. of the NE. rail, 11 ft SE. of a pole, and 9 ft SW. of
the right-of-way fence; US&GS standard disk stamped "L 38 1934" and set in the
top of a concrete post projecting about 6 in. above ground 1089.607

3
42-092-11
SUMNER QUADRANGLE
216 - IOWA

LINE 2

FEET

C. L. Crutchfield, 1969; Book CV 2490

SUMNER QUAD. - 216

2	43	0.0	USC&GS "L 38 1934" (described in Line 1)	1089.607
	43	0.6	UE L A, 0.2 mi S. of the cor. secs. 13, 14, 23 and 24, T. 93 N., R. 11 W., 11 ft S. and 91 ft E. and 0.3 ft higher than T-rd. S., in the center of the S. end of a concrete box culvert; a chiseled square, painted "UE L A"	1067.16
	44	1.4	At Sumner, near the N. city limits of the only N.-S. paved co. rd. leading N. out of town, about 0.2 mi N. and 0.2 mi E. of cor. secs. 13, 14, 23 and 24, T. 93 N., R. 11 W., about 300 ft SW. of the SW. corner of a cemetery, 19 ft W. and 3.1 ft lower than center of N.-S. paved co. hwy. at a small drain crossing, in the center of the W. headwall of a concrete box culvert; a standard tablet stamped "51 CLC 1969 1089"	1089.251
	45	1.6	Reference mark, 920 ft NE. of tablet, 32 ft S. and 80 ft E. and 0.2 ft lower than T-rd. E., top of a concrete slab for a water pump; a chiseled square, painted "RM"	1095.75
	46	2.1	UE 51 A, 0.25 mi E. of cor. secs. 11, 12, 13 and 14, T. 93 N., R. 11 W., center of T-rd. E.; a RR. spike, painted "UE 51 A"	1103.20
	47	3.9	UE 51 B, near cor. secs. 7, 8, 17 and 18, T. 93 N., R. 10 W., 29 ft N. and 254 ft E. and 1.3 ft lower than crossroads, on the S. side of a power pole; a RR. spike, painted "UE 51 B"	1148.46
	48	4.8	Sumner, 2.0 mi N. and 2.7 mi E. of, near cor. secs. 8, 9, 16 and 17, T. 93 N., R. 10 W., 19 ft N. and 20 ft E. and 0.8 ft lower than crossroads, in the center of the NE. headwall of a concrete box culvert; a standard tablet stamped "52 CLC 1969 1128"	1128.008
	49	4.8	Reference mark, 40 ft S. and 40 ft W. and 1.0 ft lower than tablet, in the center of the S. headwall of a concrete box culvert; a chiseled square, painted "RM"	1126.97
	50	5.9	UE 52 A, 1.0 mi E. along a co. rd. from tablet, 26 ft N., 34 ft W. and 1.2 ft lower than crossroads, top of the S. end of a concrete tile culvert; a chiseled square, painted "UE 52 A"	1197.70
	51	6.9	UE 52 B, 1.0 mi E. and 1.0 mi N. along a co. rd. from tablet, 35 ft S. and 35 ft W. and 1.6 ft higher than crossroads, in the center of a large concrete fence post; a chiseled square, painted "UE 52 B"	1225.88
	52	8.0	Richfield, 2.8 mi S. and 2.0 mi E. of, near cor. secs. 33, 34, 3 and 4, Tps. 93 and 94 N., R. 10 W., 540 ft N. and 17 ft W. and 3.6 ft lower than T-rd. W., top of the W. end of a large concrete tile culvert; a standard tablet stamped "53 CLC 1969 1189"	1189.334
	53	8.0	Reference mark, 37 ft E. and 0.3 ft lower than tablet, top of the E. end of large concrete tile culvert; a chiseled square, painted "RM"	1188.99
	54	9.0	UE 53 A, 1.0 mi N. along a co. rd. from tablet, 300 ft N. and 18 ft W. and 3.2 ft lower than crossroads, top of the W. end of the most northern concrete tile culvert; a chiseled square, painted "UE 53 A"	1182.23
	55	9.9	Richfield, 1.0 mi S. and 2.0 mi E. of, near cor. secs. 21, 22, 27 and 28, T. 94 N., R. 10 W., 420 ft S. and 32 ft W. and 3.3 ft lower than crossroads; a copper coated steel rod driven to a depth of 10 ft; a standard brass tablet crimped to rod, set flush with the ground and stamped "54 CLC 1969 1210"	1209.811
			DESTROYED 8-71 JSC	

DESK 0460 8-71 JSC

LINE 2 (Cont'd)

SUMNER QUAD. - 216

FEET

2 56	10.0	Reference mark, 420 ft NW. of tablet, 22 ft N. and 9 ft E. and lower than T-drive N., top of the E. end of a concrete tile culvert; a chiseled square, painted "RM"	1207.06
57	11.0	UE 54 A, 1.0 mi N. along a co. rd. from tablet, 38 ft N. and 32 ft E. and 0.7 ft lower than crossroads, on the SW. side of a corner fence post; a RR. spike painted "UE 54 A"	1159.54
58	12.0	UE 54 B, 2.0 mi N. along a co. rd. from tablet, 80 ft N. and 30 ft E. and 3.2 ft lower than crossroads, top of the N. root of an evergreen tree; a RR. spike, painted "UE 54 B"	1083.38
59	13.1	UE 54 C, 3.0 mi N. along a co. rd. from tablet, 212 ft N. and 30 ft E. and 1.1 ft lower than T-rd. W., 15 ft N. of center of a gate leading to Bethel cemetery, top of a concrete slab, for a gate support, flush with the ground; a chiseled square, painted "UE 54 C"	1092.50
60	13.5	Alpha, 0.5 mi S. and 1.0 mi E. of, near center secs. 3 and 4, T. 94 N., R. 10 W., 10 ft S. and 37 ft E. and normal to T-rd. E., in the center of the S. headwall of a concrete box culvert; a standard tablet stamped "55 CLC 1969"	1045.391
61	13.5	Reference mark, 20 ft N. and 0.1 ft lower than tablet, in the center of the N. headwall of a concrete box culvert; a chiseled square, painted "RM"	1045.27
62	14.0	UE 55 A, 0.3 mi N. and 0.1 mi W. along a co. rd. from tablet, center of wooden bridge over an E.-W. gravel rd.; a copper nail and washer, painted "UE 55 A"	1035.53
63	15.1	UE 55 B, at Alpha, at the Public School house, 107 ft S. and 3.8 ft higher than T-rd. N., in the center of the first step; a chiseled square, painted "UE 55 B"	1046.55
64	15.9	UE 55 C, 0.25 mi W. of the center of secs. 32 and 33, T. 95 N., R. 10 W., center of T-rd. S.; a RR. spike, painted "UE 55 C"	1092.14
65	16.9	Alpha, 0.5 mi N. and 1.5 mi W. of, 0.25 mi W. of the center of secs. 31 and 32, T. 95 N., R. 10 W., 11 ft N. and 68 ft W. and 3.1 ft lower than center of bridge over Cane Creek, in the center on top of the N. pier; a standard tablet stamped "56 CLC 1969"	1036.781
66	16.9	Reference mark, 22 ft S. and 72 ft W. and 2.5 ft higher than tablet, top of the SW. wingwall of a concrete bridge over Cane Creek; a chiseled square, painted "BM"	1039.26
<u>LAWLER QUAD. - 239</u>			
67	18.2	UE 56 A, 1.3 mi WNW. along a co. rd. from tablet, 10 ft N. and 1.0 ft lower than center of E.-W. rd. at a drain crossing, in the center of the N. headwall of a concrete box culvert; a chiseled square, painted "UE 56 A"	1055.36
68	18.8	UE 56 B, 1.9 mi WNW. along a co. rd. from tablet, 85 ft S. and 101 ft W. and 0.4 ft higher than T-rds. in the center of the first door step of a school house; a chiseled square, painted "UE 56 B"	1068.24
69	19.8	Fredericksburg, 3.0 mi N. and 4.0 mi E. of; near cor. secs. 26, 27, 34 and 35, T. 95 N., R. 11 W., 35 ft S. and 37 ft E. and 2.3 ft lower than crossroads, top of a concrete slab used as a corner post; set flush with the ground; a standard tablet stamped "57 CLC 1969"	1087.031
70	19.8	Reference mark, 65 ft N. and 2 ft W. and 0.1 ft higher than tablet, top of a concrete slab used as a corner fence post support flush with the ground; a chiseled square, painted "RM"	1087.10

<u>LINE 2 (Cont'd)</u>		<u>SUMNER QUAD. - 216</u>	<u>FEET</u>
21 71	20.8	UE 57 A, 1.0 mi W. along a co. rd. from tablet, center of crossroads; a RR. spike, painted "UE 57 A"	1173.73
72	22.0	UE 57 B, 2.2 mi W. along a co. rd. from tablet, 11 ft S. and 15 ft W. and 1.9 ft lower than center of wooden bridge over E.-W. co. rd., top of the SW. bridge support; a copper nail and washer, painted "UE 57 B"	1125.72
73	22.9	UE 57 C, 3.0 mi W. along a co. rd. from tablet, 35 ft N. and 28 ft W. and 0.8 ft lower than T-rd. N., top of a large rock; a chiseled square, painted "UE 57 C"	1201.02
74	23.6	Boyd, 0.3 mi S. and 3.5 mi E. of; 0.2 mi S. of center secs. 30 and 31, T. 95 N., R. 11 W., 1003 ft S. and 17 ft W. of crossroads, 17 ft W. and 1.8 ft lower than center of N.-S. rd. at a small drain crossing, top of the W. end of the most southern concrete tile culvert; a standard tablet stamped "58 CLC 1969"	1113.808
75	23.6	Reference mark, 11 ft N. and 35 ft E. and 0.3 ft higher than tablet, top of the E. end of the most northern concrete tile culvert; a chiseled square, painted "RM"	1114.13
76	24.9	UE 58 A, near center secs. 25 and 36, T. 95 N., R. 12 W., 12 ft S. and 88 ft W. and 1.1 ft higher than center of bridge over a large drain, top of the SW. wheelguard; a chiseled square, painted "UE 58 A"	1090.88
77	25.6	UE 58 B, near center secs. 26 and 35, T. 95 N., R. 12 W., center of T-rd. S.; a RR. spike, painted "UE 58 B"	1135.49
78	26.1	UE 58 C, near cor. secs. 26, 27, 34 and 35, T. 95 N., R. 12 W., center of T-rd. N.; a RR. spike, painted "UE 58 C"	1138.05
79	27.2	Boyd, 0.5 mi SE. along the C. & GW. RR. from the station at; 0.1 mi SE. of milepost 150, 411 ft SE. of the crossing of a rd., 42.6 ft NE. of the NE. rail, 7 ft E. of a pole, and 4.6 ft SW. of the right-of-way fence; a USC&GS standard disk stamped "S 38 1934" and set in the top of a concrete post projecting about 2 in. above ground	1120.191

LINE 3

C. L. Crutchfield, 1969; Book CV 2490

OELWEIN NO. 3 QUAD. - 192

3 18	0.0	Westgate, Fayette County, 1.7 mi SE. along the C. GW. RR. from the station at; 0.4 mi NW. of milepost 174, at the crossing of a section rd., 54 ft N. of the center of the rd., 45.3 ft NE. of the NE. rail, 25.7 ft NW. of one right-of-way fence, and 2 ft SW. of another right-of-way fence; USC&GS standard disk stamped "E 38 1934" and set in the top of a concrete post projecting about 4 in. above ground	1079.335
18	0.1	UE E 38 A, 680 ft W. and 7.7 ft higher than tablet, center of crossroads; a RR. spike, painted "UE E A"	1087.02

DUNKERTON QUAD. - 193

19	1.2	UE E 38 B, 1.2 mi W. along a county rd. from tablet, 18 ft S. and 372 ft W. and 2.0 ft lower than T-rd. W., top of the S. end of the most eastward concrete tile culvert; a chiseled square, painted "UE E B"	1067.81
20	2.1	UE E 38 C, 2.1 mi W. along a county rd. from tablet, 25 ft S. and 25 ft W. and 4.3 ft lower than T-rd. E., top of the S. end of a metal corrugated culvert; a punched hole, painted "UE E C"	1048.32
21	3.5	At Downing Park, 0.25 mi S. of cor. secs. 28, 29, 32 and 33, T. 92 N., R. 10 W., 315 ft N. and 220 ft W. and 6.3 ft lower than crossroads, at the concrete base of a playground slide; a standard tablet set flush with the ground, and stamped "61 CLC 1969 1018"	1017.999

<u>LINE 3 (Cont'd)</u>		<u>DUNKERTON QUAD. - 193</u>	<u>FEET</u>
3 22 3.5	Reference mark, 25 ft N. and 25 ft W. and 0.7 ft lower than tablet, top of a concrete slab which holds the water fountain; a chiseled square, painted "RM"		1017.31
23 4.3	UE 61 A, 0.9 mi W. along a county rd. from tablet, 13 ft S. and 54 ft W. and 1.2 ft lower than center of wooden bridge over Little Wapsipinicon River; top of the SW. end; a RR. spike in a wooden piling; painted "UE 61 A"		1006.21
24 5.7	Downing Park, 2.0 mi W. of, near cor. secs. 25, 30, 36 and 31, T. 92 N., Rs. 10 and 11 W., 760 ft N. and 20 ft E. and 1.6 ft lower than T-rd. E., top of the E. end of a concrete tile culvert; a standard tablet stamped "62 CLC 1969 1057"		1057.080
25 5.7	Reference mark, 40 ft W. and 0.1 ft higher than tablet, top of the W. end of a concrete tile culvert; a chiseled square, painted "RM"		1057.23
26 6.7	UE 62 A, near center sec. 25, T. 92 N., R. 11 W., 29 ft S. and 4.7 ft lower than center of E.-W. gravel rd. and N.-S. fence line, top of the W. end of a metal corrugated culvert; a punched hole, painted "UE 62 A"		1062.95
27 7.7	UE 62 B, near center sec. 26, T. 92 N., R. 11 W., 37 ft S. and 15 ft W. and 0.9 ft higher than crossroads, in the center of the W. concrete wheel guard of a concrete and wooden bridge; a chiseled square, painted "UE 62 B"		1038.88
28 8.5	Oran, 3.0 mi N. and 1.7 mi W. of; about 0.2 mi W. of the center of secs. 26 and 35, 12 ft S. and 0.3 ft lower than center of E.-W. rd. at a drain crossing, in the center of the S. headwall of a concrete box culvert; a standard tablet stamped "63 CLC 1969 1034"		1033.694
29 8.5	Reference mark, 24 ft N. and normal to tablet, in the center of the N. headwall of a concrete box culvert; a chiseled square, painted "RM"		1033.73
30 9.3	UE 63 A, 0.8 mi W. along a county rd. from tablet, 12 ft S. and 24 ft E. and 0.1 ft lower than crossroads, in the center of the S. headwall of a concrete box culvert; a chiseled cross, painted "UE 63 A"		1015.70
31 9.8	Buck Creek, 0.5 mi S. of, near cor. secs. 27, 28, 33 and 34, T. 92 N., R. 11 W., 142 ft S. and 14 ft W. and 1.6 ft lower than crossroads, in the center of the W. headwall of a concrete box culvert; a 1-in. hex. steel bolt embedded in concrete, painted "BM" (TBM 64)		1007.05
32 9.8	Reference mark, 28 ft E. and 0.2 ft higher than bolt, in the center of the E. headwall of a concrete box culvert; a chiseled square, painted "RM"		1007.25
33 10.3	UE 64 A, 0.5 mi W. along a county rd. from bolt, 35 ft N., 12 ft W. and 0.7 ft lower than crossroads, in the center of the W. headwall of a concrete box culvert; a chiseled cross, painted "UE 64A"		1023.25
34 11.6	UE 64 B, near center sec. 32, T. 92 N., R. 11 W., 28 ft N. and 19 ft W. and 1.8 ft lower than a 90° turn in gravel rd. leading N. and W., T-rd. N., top of the W. end of a metal corrugated culvert; a punched hole, painted "UE 64 B"		981.58
35 12.0	UE 64 C, near center secs. 31 and 32, T. 92 N., R. 11 W., 62 ft W. of center of E. end of a wooden bridge over Wapsipinicon River; a copper nail and washer, painted "UE centerline"		975.43
36 12.7	UE 64 D, near cor. secs. 29, 30, 31 and 32, T. 92 N., R. 11 W., 17 ft N. of a 90° turn in a gravel rd. leading S. and W.; a copper nail and washer at center of S. end of a small wooden bridge over an E.-W. drainage ditch; painted "UE 64 D"		972.59

LINE 3 (Cont'd)

DUNKERTON QUAD. - 193

FEET

- 3 37 13.8 UE 64 E, near cor. secs. 25, 30, 31 and 36, T. 92 N., R. 11 and 12 W., 16 ft N. and 630 ft W. and 0.7 ft lower than crossroads, in the side of the N. end of a wooden box culvert; a RR. spike, painted "UE 64 E" 990.72
- 38 14.4 Readlyn, 3.0 mi N. and 0.8 mi E. of, 0.3 mi E. of cor. secs. 25, 26, 35 and 36, T. 92 N., R. 12 W., 11 ft S. and 0.8 ft lower than center of E.-W. gravel rd. at a small drain crossing, in the center of the S. headwall of a concrete box culvert; a standard tablet stamped "65 CLC 1969" 1030.903
- 39 14.4 Reference mark, 22 ft N. and 0.2 ft lower than tablet, in the center of the N. headwall of a concrete box culvert; a chiseled square, painted "RM" 1030.74
- 40 14.7 UE 65 A, 0.3 mi W. along a county rd. from tablet, 25 ft N. and 35 ft W. and 2.7 ft lower than crossroads, top of the N. end of a metal corrugated culvert; a punched hole, painted "UE 65 A" 1043.52
- 41 15.7 UE 65 B, 1.3 mi W. along a county rd. from tablet, 11 ft S. and 150 ft W. and 1.6 ft lower than crossroads, in the center of the S. headwall of a concrete box culvert; a chiseled cross, painted "UE 65 B" 1027.34
- 43 17.7 Readlyn, 2.75 mi N. and 2.75 mi W. of, T. 92 N., R. 12 W., near cor. secs. 28, 29, 32 and 33, 33 ft S. and 134 ft W. of T-rd. N., 1 ft S. of right-of-way fence, in concrete post; standard tablet stamped "TT 6 MWL 1961" 997.784

LINE 4

R. Blaser, 1977; Book CV-3384

DECORAH NO. 3 QUAD. - 238

- 3 45 11.5 UE 15 B, 0.9 mi S. along road and 0.8 mi W. along road from tablet, T. 95 N., R. 10 W., about 400 ft W. of the quarter cor. between secs. 26 and 35, 26 ft S. and 12 ft E., 1.9 ft lower than road at drive S. on E. end of 1 ft steel corrugated culvert, copper nail and washer 1122.08

LAWLER QUAD. - 239

- 12.2 Reference mark, 149 ft ESE. of tablet; 41 ft S., 123 ft E. and 3.7 ft lower than road at drain 0.3 ft above ground, on N. side of a power pole, a R.R. spike 1064.16
- 12.2 BM, Fort Atkinson, 9.5 mi S. and 3.75 W. of; T. 95 N., R. 10 W. near the E. sixteenth cor. between secs. 27 and 34, 20 ft N., 13 ft W. and 1.3 ft lower than road at drain, 1 ft SE. of NW. end of 5.7 ft round concrete culvert, standard tablet stamped "16 ROD 1977" 1066.555

SUMNER QUAD. - 216

- 13.1 UE 16 A, 0.25 mi W. along road and 0.6 mi S. along road from tablet, T. 95 N., R. 10 W., about 600 ft S. and about 200 ft E. of the center of sec. 34, about 310 ft SE. along road grade and 8 ft SW. to R.R. grade from road at R.R. grade, 69 ft NW. along R.R. bridge and 8 ft SW. to R.R. bridge from center of R.R. bridge 138 ft bridge, 0.8 ft below bridge on top of NW. end of SW. side of concrete foundation of bridge, chiseled square 1023.34
- 14.6 BM, Alpha, 0.5 mi S., 1 mi E. of, near center of secs. 3 and 4, T. 94 N., R. 10 W., 10 ft S. and 37 ft E. of T-rd. E. in the center of a headwall of a concrete box culvert, standard tablet stamped "55 CLC 1969" 1045.391