

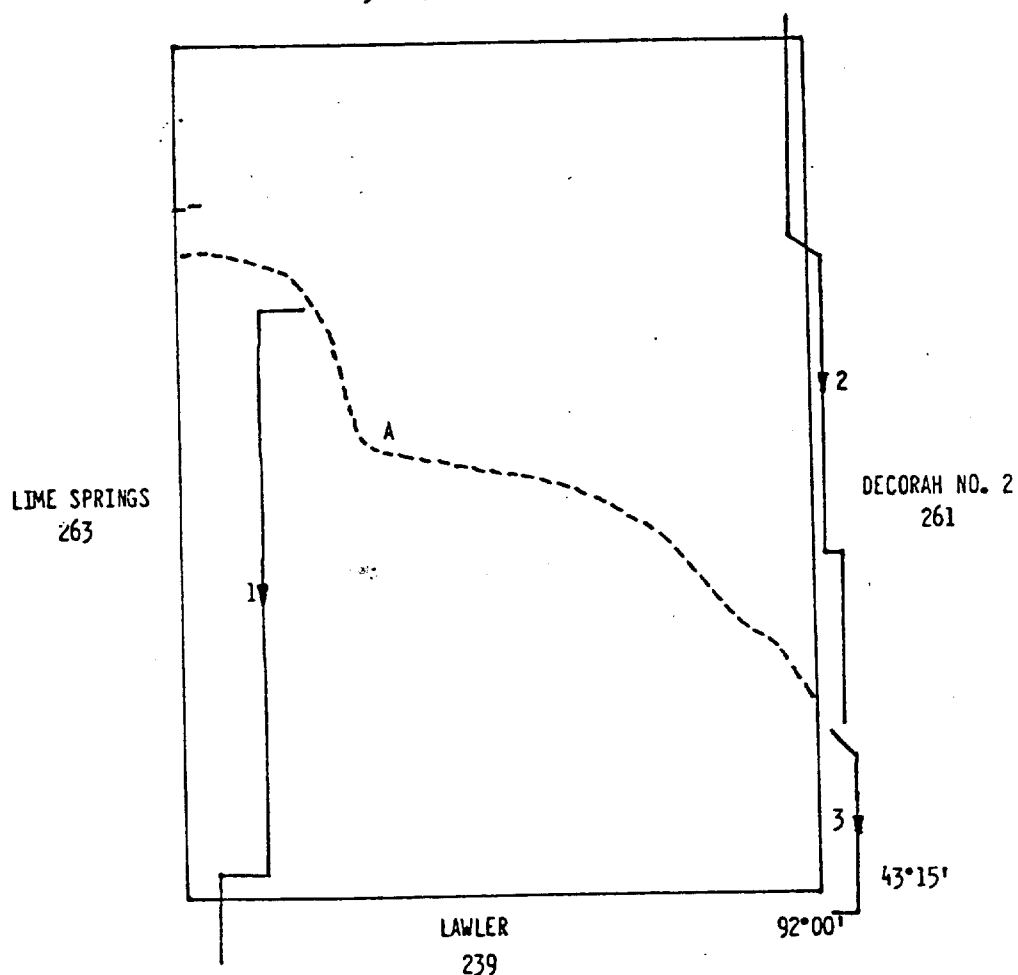
THIRD-ORDER LEVELS

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYCRESCO QUADRANGLE
262 - IOWA
N4315-W9200/15
DIAGRAM HK 15-2
MASON CITY

Howard and Winneshiek Counties

Edition of: 3-1-78

ADP/JNF/cb

PRESTON
5 - MINN.N.G.S. (USC&GS) VERTICAL CONTROL DATA

A. Quadrangle No. 450922

262 B

LINE 1

FEET

R.R. Blaser, 1977; Book CV-3384

CRESCO QUAD. - 262

- 1 2 0.0 BM, 0.4 mi NW. along the Chicago, Milwaukee, St. Paul and Pacific R.R. from the station at Bonair, Howard County, 53 ft W. of the sec. line road crossing; 22.5 ft W. of the first pole W. of the crossing, 45.5 ft SW. of the SW. rail, and 3 ft NE. of right-of-way fence, a standard disk stamped "S 41 RESET 1956" and set in the top of a concrete post 1504.210
- 3 0.3 UE S 41 A, 0.3 mi S. along road from tablet, T. 99 N., Rs. 11 and 12, near quarter cor. between secs. 1 and 6, 26 ft N., 78 ft E. and 45 ft lower than crossroads, 26 ft N. and 22 ft W. of field entrance N., on W. end of 1.5 ft steel corrugated culvert, copper nail and washer 1508.25
- 6 1.3 UE S 41 B, 0.3 mi S. and 1 mi W. of tablet, T. 99 N., R. 12 W., near quarter cor. between secs. 1 and 2, 26 ft N., 153 ft E. and 1.9 ft lower than T-rd. S., 26 ft N. and 14 ft W. of road at field entrance N., on W. end of 2 ft steel corrugated culvert; copper nail and washer 1255.64
- 10 2.3 Reference mark, 105 ft NE. of tablet, 28 ft S. and 26 ft E. and 2.9 ft lower than road at fence W. 12 ft S. and 26 ft E. of road at field entrance E., on S. end of 2.5 ft steel corrugated culvert, copper nail and washer 1224.77
- 11 2.4 BM, Cresco, 2.5 mi N. and 5 mi W. of; T. 99 N., R. 12 W., near quarter cor. between secs. 11 and 12, 126 ft S. and 11.5 ft W. and 0.9 ft higher than road at fence W., 11 ft S. and 11.5 ft W. of the center of 25 ft bridge, 9 ft above drain, 1 ft above bridge, 1.5 ft N. of S. end of W. curb of bridge, a standard tablet stamped "1 ROD 1977" 1228.555
- 13 2.9 UE 1 A, 0.5 mi S. along road from tablet, T. 99 N., R. 12 W., near cor. of secs. 11, 12, 13 and 14, 26 ft S. and 81 ft W. and 3.6 ft lower than crossroads, on E. end of 1.5 ft steel corrugated culvert at field entrance S., copper nail and washer 1218.59
- 16 3.9 UE 1 B, 1.5 mi S. along road from tablet; T. 99 N., R. 12 W. near cor. of secs. 13, 14, 23 and 24, 35 ft S. and 10 ft W. and 0.3 ft lower than center of 68 ft bridge, 219 ft S., 10 ft W. and 1.6 ft higher than road at fence W. on top of most northerly of three bridge pilings on SW. side of bridge, copper nail and washer 1208.00
- 19 5.0 Reference mark, 407 ft NNE. of BM, 371 ft N., and 36 ft E. of the center of bridge, 14 ft S. and 36 ft E. of road at field entrance E., on S. end of 1.5 ft steel corrugated culvert, copper nail and washer 1203.96
- 20 5.1 BM, Cresco, 0.2 mi S. and 5 mi W. of; T. 99 N., R. 12 W. about 1050 ft S. of the cor. of secs. 23, 24, 25 and 26, 33 ft S., 14.5 ft W. of the center of 64 ft bridge, 1 ft above bridge, 13 ft above W. on S. end of W. curb of bridge, standard tablet stamped "2 ROD 1977" 1201.555

LINE 1 (Cont'd)

CRESCO QUAD. - 262

FEET

- | | | | | |
|----|------|--|---|---------|
| 1 | 22 | 5.8 | UE 2 A, 0.8 mi S. along road from tablet; T. 99 N., R. 12 W., about 330 ft N. of the cor. of secs. 25, 26, 35 and 36, 329 ft N. and 35 ft E. of, 1.3 ft lower than road at E.-W. fence, 12 ft N. and 35 ft E. and 3.3 ft lower than road at drive E. on N. end of 1.5 ft steel corrugated culvert, copper nail and washer | 1257.97 |
| 27 | 6.9 | UE 2 B, 1.8 mi S. along road from tablet; T. 98 and 99 N., R. 12 W., near the cor. of secs. 1, 2, 35 and 36, 21 ft S., 40 ft W. and 2.9 ft lower than road at E.-W. fence, on S. end of 1.7 ft steel corrugated culvert; copper nail and washer | 1229.70 | |
| 30 | 7.9 | Reference mark, 100 ft E. of tablet; 27 ft N., 39 ft E. and 1.7 ft lower than crossroads; on N. end of 4.5 ft concrete culvert; chiseled square | 1197.07 | |
| 31 | 7.9 | BM, Cresco, 3 mi S. and 5 mi W. of; T. 98 N., R. 12 W., near the cor. of secs. 1, 2, 11 and 12, 17 ft N., and 61 ft W. and 0.3 ft higher than crossroads, 8 ft above drain on W. end of N. headwall of 22.5 ft double concrete box culvert, standard tablet stamped "3 ROD 1977" | 1199.119 | |
| 35 | 8.9 | UE 3 A, 1 mi S. along road from tablet; T. 98 N., R. 12 W., near the cor. of secs. 11, 12, 13 and 14, 21 ft S., 41 ft W. and 2.1 ft lower than crossroads, on S. end of 2 ft steel corrugated culvert; copper nail and washer | 1220.52 | |
| 37 | 9.9 | BM, Cresco, 5 mi S. and 5 mi W. of; about 0.2 mi S. of Schley, T. 98 N., R. 12 W., near the cor. of secs. 13, 14, 23 and 24, 145 ft N., 213 ft W. and 8 ft lower than crossroads, 22 ft N. and 74 ft W. of abandoned school, 29 ft E. of N.-S. fence, 1.2 ft S. and 1.2 ft W. of the NE. cor. of a 10 ft by 8 ft concrete slab, standard tablet stamped "4 ROD 1977" | 1257.950 | |
| 38 | 10.0 | Reference mark, 299 ft SE. of tablet, 32 ft S., 28 ft E. and 2.3 ft lower than crossroads, (jct. J46 and A46) on N. end of 2 ft concrete culvert; chiseled square | 1261.57 | |
| 41 | 11.0 | UE 4 A, 1 mi S. along road from tablet, T. 98 N., R. 12 W., near cor. of secs. 23, 24, 25 and 26, 31 ft S., 47 ft W. and 2.7 ft lower than I.-rd. W. on S. end of 2 ft steel corrugated culvert; copper nail and washer | 1239.76 | |
| 45 | 12.1 | UE 4 B, 2 mi S. along road from tablet; T. 98 N., R. 12 W. near cor. of secs. 25, 26, 35 and 36, 20 ft S., 29 ft E. and 3.3 ft lower than crossroads, on S. end of 2 ft concrete culvert, chiseled square | 1221.17 | |
| 48 | 13.1 | Reference mark, 144 ft E. of tablet, 40 ft S., 15 ft W. and 2.7 ft lower than crossroads, on W. end of 1.8 ft steel corrugated culvert; copper nail and washer | 1214.74 | |
| 49 | 13.1 | BM, Cresco, 8 mi S. and 5 mi W. of; 3.2 mi S. of Schley, Iowa, Ts. 97 and 98 N., R. 12 W., near the cor. of secs. 1, 2, 35 and 36, 34 ft S., 149 ft W. and 1.5 ft higher than crossroads, 34 ft S. and 24 ft E. of road at drive to power substation, 7 ft N. and 25 ft E. of metal gate to substation, 3.3 ft E. of power pole No. H12, 2.5 ft S. of USGS witness sign and S. right-of-way fence, standard tablet on copper coated steel rods centered in 6-in. diameter tile filled with gravel and stamped "5 ROD 1977" set flush with ground | 1218.973 | |

LINE 1 (Cont'd)

CRESCO QUADRANGLE 262

FEET

1 51 14.1 UE 5 A, 1 mi W. along road from tablet, Ts. 97 and 98 N., R. 12 W., near the cor. of secs. 2, 3, 34 and 35, 27 ft N. and 26 ft W. and 2.8 ft lower than T-rd. S., on W. end of 2 ft concrete culvert; chiseled square 1241.88

LAWLER QUAD. - 239

54 15.0 UE 16 A, 1 mi N. along road from tablet; 16 CDL 1972; 34 ft S., 90 ft W. and 2.1 ft lower than T-rd. W., a R.R. spike in a power pole also used as a corner fence post 1207.12

59 16.2 BM, New Hampton, at the jcts. of U.S. Hwys. 18 and 63, 10 mi S. and 6 mi W. of Cresco, Iowa, T. 97 N., R. 12 W., near cor. of secs. 10, 11, 14 and 16, 10.7 ft W. of; and 0.3 ft lower than road at drain, 712 ft S. and 10.3 ft W. of crossroads set in corner of the W. headwall of a concrete box culvert, standard tablet stamped "16 CDL 1972" 1194.406

LINE 2

G. Sandul, 1977; Book CV-3386

PRESTON QUAD. 5 MINN.

1 1 0.0 BM, Harmony, 2 mi S. of junction of 139 and 26 along 139; 1.2 mi S. and 4.1 mi E. of junction of 52 and county 21 in Canton along road, 21 and county 30; near SE. cor. of sec. 27, T. 101 N., R. 10 W., at crossroads of State 139 and county 30, 48 ft N. and 142 ft W. of centerline of crossroads, 4 ft W. of fence corner, 2 ft S. of fence and 0.8 ft S. of white witness sign, in concrete post flush with ground, a standard disk stamped "9 RMM 1963" 1262.871

5 0.9 BM, Harmony, 3 mi S. of along State Hwy. 139, near SE. cor. of sec. 34, T. 101 N., R. 10 W., 355 ft N. and 70 ft W. of centerline of crossroads (E.-W. road on State line), 1.8 ft NE. of NE. corner of fence at corner of state line cemetery, 29 ft E. of T-fence N., 1.5 ft ENE. of witness sign, in concrete post, a standard N.G.S. azimuth mark disk stamped "CANTON 1961" 1269.046

5 1.0 Reference mark, about 588 ft SSE. of azimuth mark, 215 ft S. and 30 ft E. of centerline crossroads, on E. headwall of concrete box culvert; a chiseled square 1246.99

CRESCO QUAD. - 262

8 2.0 UE Canton A, 1.1 mi S. of disk along State Hwy. 139, at cor. secs. 10, 11, 14 and 15, T. 100 N., R. 10 W., 38 ft S. and 36 ft E. of centerline of crossroads, on S. end of concrete pipe culvert, a chiseled square 1229.91

9 2.5 UE Canton B, 1.6 mi S. of azimuth mark along State Hwy. 139, near quarter cor. between secs. 14 and 15, T. 100 N., R. 10 W., at small drain, 15 ft W. of centerline of hwy., 17 ft above drain, 0.5 ft N. of S. end of W. concrete headwall of box culvert; a brass bolt stamped "UE" 1177.82

LINE 2 (Cont'd)

CRESCO QUAD. - 262

FEET

- | | | | | |
|-----------------------------------|----|-----|--|----------|
| 1 | 12 | 3.8 | BM, Harmony, Minn., 6 mi S. of along State Hwy. 139, about 995 ft N. of crossroads at corner of secs. 22, 23, 26 and 27, T. 100 N., R. 10 W., 312 ft N. along hwy. from hwy. at fence W., 22 ft W. of centerline of hwy., 4 ft above drain, 1.5 ft lower than centerline hwy. set in the center of 3 ft concrete headwall of box culvert, a standard tablet stamped "1 SAN 1977" | 1183.66 |
| 14 | | 4.0 | Reference mark, 1050 ft S. of BM, 41 ft S. and 41 ft E. than centerline of crossroads, on S. end of flared 36-in. concrete culvert, a chiseled square | 1165.65 |
| 15 | | 4.7 | UE 1 A, 0.95 mi S. of BM, along State Hwy. 139 in SE $\frac{1}{4}$ of sec. 23, T. 100 N., R. 10 W., at junction of road SE. leading S., 163 ft SE. along road from centerline of I-rd., 22 ft normal and on SW. side of road on SW. end corrugated steel culvert, a painted square and stamped UE" | 1194.14 |
| 17 | | 5.6 | Reference mark, 255 ft NW. of BM and at NW. end of bridge, in centerline of bridge floor (road surface) at extreme NW. end of bridge, a chiseled square | 1050.21 |
| 18 | | 5.6 | BM, Harmony, Minn., 7 mi S. of along State Hwy. 139, thence 0.9 mi S. along gravel road 4.5 mi N. and 5.75 mi E. of Cresco, in W $\frac{1}{2}$ of sec. 35, T. 100 N., R. 10 W., at SE. end of long concrete bridge over upper Iowa River, 13 ft normal and SW. side of centerline of road, 26.7 ft above water level (set in the SW. end of SE. abutment of bridge) (on outside of concrete guard rail, a standard tablet stamped "2 SAN 1977" | 1055.430 |
| 20 | | 6.2 | UE 2 A, 0.6 mi SE. of BM along gravel road, in NW $\frac{1}{4}$ sec. 2, T. 99 N., R. 10 W., at S. end of small bridge, 31 ft S., 11 ft W. of and 0.2 ft higher than centerline of bridge, on top of SW. wooden bridge piling, a copper nail and washer | 1037.63 |
| 22 | | 7.3 | UE 2 B, 1.67 mi SSE. of BM along gravel road, near quarter cor. between secs. 2 and 11, T. 99 N., R. 10 W., 35 ft normal and on W. side of centerline of I-rd. E. in base on E. side of corner fence post, a R.R. spike | 1185.29 |
| 25 | | 8.1 | BM, Cresco, 2.25 mi N. and 6 mi E. of, about 1485 ft S. of I-rd. W. at center of sec. 11, T. 99 N., R. 10 W., 2 ft N., 11 ft E. and 0.9 ft lower than centerline of I-drive W., set in the center of E. headwall (13 ft long) of concrete box culvert, a standard tablet stamped "3 SAN 1977" | 1181.974 |
| 26 | | 8.1 | Reference mark, 330 ft S. of BM, 42 ft E. of centerline of road, in base on W. side of power pole, a R.R. spike | 1190.70 |
| <u>DECORAH NO. 2 QUAD. - IOWA</u> | | | | |
| 28 | | 8.8 | UE 3 A, 0.25 mi S. and 0.5 mi E. of BM along gravel road, near cor. secs. 11, 12, 13 and 14, T. 99 N., near cor. secs. 11, 12, 13 and 14, T. 99 N., R. 10 W., 42 ft N. and 7 ft E. of centerline of I-rd. S., in base on S. side of corner (S. most of two) fence post, a R. R. spike | 1185.64 |
| 30 | | 9.5 | UE 3 B, 0.25 mi E. and 0.7 mi S. of BM along gravel road near S. sixteenth cor. between secs. 13 and 14, T. 99 N., R. 10 W., at a drain, 15 ft W. of centerline of rd., 0.7 ft higher than rd. at drain, 12 ft above drain, on S. end W. concrete headwall, a chiseled square | 1146.63 |

LINE 2 (Cont'd)

DECORAH NO. 2 QUAD. - IA..

FEET

- 1 34 11.0 Reference mark, 275 ft N. of BM, 185 ft N. and 49 ft W. of centerline hwy. at fence W. at N. edge churchyard, on N. edge of 5.5 ft circular concrete well foundation, a chiseled square 1242.12
- 35 11.1 BM, Cresco, 6.5 mi E. of, about 1500 ft S. of corner secs. 23, 24, 25 and 26, T. 99 N., R. 10 W., at the Orleans Lutheran Church, 71 ft E. of the front entrance to church, 33 ft W. of centerline of county hwy. W14, 6.2 ft E. of fence surrounding church yard, set in the top of S. end of bottom concrete step of entrance leading into church yard, a standard disk stamped "4 SAN 1977" 1250.014
- 37 11.8 UE 4 A, 0.75 mi S. of BM along county hwy. W14 near cor. secs. 25, 26, 35 and 36, T. 99 N., R. 10 W., 48 ft N. and 71 ft W. of centerline crossroads, in E. side of corner fence, head of large nail 1204.81
- 40 12.9 UE 4 B, 1.8 mi S. of BM along county hwy. W14, near N. common cor. secs. 1 and 2, T. 98 N., R. 10 W., 34 ft NW., thence 36 ft NE. along roads from centerline I-rd. NE. leading E., on NW. end corrugated steel culvert, a painted square and stamped "UE" 1198.76
- 44 13.8 BM, Cresco, 3 mi S. and 7 mi E. of, 2 mi N. and 0.5 mi E. of Ridgeway near cor. secs. 1, 2, 11 and 12, T. 98 N., R. 10 W., 63 ft N. and 59.5 ft W. of centerline crossroads, 25 ft N. of corner fence post, 1.4 ft E. of fence, 1 ft E. of witness sign, on top of 15 ft copper coated steel rod, a standard tablet stamped "5 SAN 1977" 1188.889
- 46 13.9 Reference mark, about 160 ft SE. of BM, 32 ft S. and 61 ft E. of centerline of crossroad, in W. side corner fence post, a R.R. spike 1190.20
- 49 15.2 UE 5 A, 1.35 mi S. of BM, along county hwy. W14, 1865 ft S. of cor. secs. 11, 12, 13 and 14, T. 98 N., R. 10 W., at a drain, 20 ft E. of centerline hwy., 1.4 ft lower than centerline of hwy. at drain, 12.4 ft above drain, on S. end of E. concrete headwall of box culvert; a chiseled square 1161.71
- 52 15.9 UE 5 B, 2 mi S. of BM, along county hwy. W14, near cor. secs. 13, 14, 23 and 24, T. 98 N., R. 10 W., 33 ft N. and 79 ft W. of centerline of crossroads, in E. side corner fence post, a R.R. spike 1177.63
- 53 16.4 BM, Ridgeway, near the NW. corner of the village near N½ cor. sec. 23, T. 98 N., R. 10 W., on railroad right-of-way and at NW. most street crossing in village, 103 ft SE. along R.R. from centerline grade crossing, 38.2 ft NE. of NE. rail of main track, 52.9 ft SW. of SW. corner of a garage, 37.6 ft NW. of a "Derail" sign, 1 ft NW. of a white witness sign, set in the top of concrete post 0.6 ft below ground surface, a standard disk stamped "C 42 1934" 1207.914

LINE 3

FEET

R.R. Blaser, 1977; Book CV-3384

DECORAH NO. 2 QUAD. - 261

- 2 71 0.0 At Ridgeway, Winneshiek county on the Chicago, Milwaukee, St. Paul and Pacific R.R., 134 yards NW. of the station, 82 ft E. of the road crossing, 37.8 ft NE. of the NE. rail of the main track and 7 ft W. of a pole, a standard disk stamped "C 42 1934" and set in the top of a concrete post, about 0.8 ft below the ground 1207.914
- 75 1.5 UE C 42 A, 1.26 mi SE. and S. along road from tablet, T. 98 N., R. 10 W., near the cor. of secs. 23, 24, 25 and 26, 19 ft S., 28 ft E. and 1.5 ft lower than crossroads on S. end of 3.5 ft concrete culvert; chiseled square 1184.63
- 78 2.3 UE C 42 B, 2.25 mi SE. and S. along road from tablet, T. 98 N., R. 10 W., near the cor. of secs. 25, 26, 35 and 36, 106 ft S., 53 ft W. and 1.7 ft lower than T-rd. W., 0.5 ft above ground in E. side of power pole lag bolt 1171.31
- 79 2.7 Reference mark, 190 ft N. of tablet; 460 ft N., 34 ft E. and 3.7 ft lower than T-rd. W. 9 ft S. and 34 ft E. of road at field entrance E., 2 ft N. and 8 ft W. of NW. cor. of cemetery on S. end of 1.5 ft steel corrugated steel culvert; copper nail and washer 1164.14
- 80 2.7 BM, Ridgeway, 2.5 mi S. and 0.25 mi E. of, 8 mi N. and 2.5 mi W. of Fort Atkinson, T. 98 N., R. 10 W., near the quarter cor. between secs. 35 and 36, 270 ft N., 37 ft E. and 2.1 ft higher than T-rd. W., 4.5 ft W. of cemetery fence, 1 ft N. of S. end of third step at main entrance to Lincoln Lutheran cemetery standard tablet stamped "6 ROD 1477" 1169.996

DECORAH NO. 3 QUAD. - 238

- 14 3.3 UE 6 A, 0.5 mi S. along road from tablet; T. 97 and 98 N., R. 70 W., near cor. of secs. 1, 2, 35 and 36, 69 ft S., 53 ft E. and 2.8 ft lower than crossroads, 22 ft S. and 1.5 ft W. of fence corner, 0.5 ft above ground, in W. side of power pole of E.-W. power line, a lag bolt 1117.53
- 17 4.3 UE 6 B, 1.5 mi S. along road from tablet; T. 97 N., R. 10 W., about 400 ft W. of the cor. of secs. 1, 2, 11 and 12, 23 ft S., 3.5 ft W. and 1.8 ft lower than T-rd. NE., 23 ft S. and 9 ft E. of road at field entrance S. on E. end of 1 ft steel corrugated culvert; a copper nail and washer 1083.72

line 3 (Cont'd)

DECORAH NO. 4 QUAD. - 238

FEET

- 1 51 16.2 BM, West Union at the junction of U.S. Hwy. 18 and State Hwy. 150, 4.5 mi N. and 4.25 mi E. of; T. 95 N., R. 8 W., 0.25 mi W. of the quarter cor. between secs. 19 and 24, 34.7 ft S. and 40.3 ft W. of; and 2.1 ft lower than T-rd. E., 3 ft S. of a fence corner and 10.2 ft W. of a power pole, set on top of a 0.5 in. copper coated steel rod which is enclosed by a 6-in. tile, a standard tablet stamped "11 CDL 1977" 901.382
- 52 16.3 Reference mark, 18 ft N. and 181.3 ft E. of a T-rd. E., 18 ft N. and 13 ft W. of a field entrance N. and 52.7 ft N. and 215.9 ft E. of tablet, a chiseled square on the W. end of a concrete culvert 896.80
- 55 17.0 UE 11 A, 0.75 mi S. along road from tablet, T. 95 N., R. 8 W., in the NE¼ of sec. 25, 11 ft W. of centerline of bridge over Turkey River, it is 3.4 ft lower than centerline of bridge on top of a 1.5 in. steel rod which is set in the top of a concrete pillar steel rod projects 0.4 ft above pillar. 865.35
- 58 18.1 UE 11 B, 1.8 mi S. along road from tablet, T. 95 N., R. 8 W., near the quarter cor. between secs. 25 and 36, 13 ft S. and 46 ft W. of; and 2.1 ft lower than T-rd. W., a punched hole in a metal culvert 1015.58
- 63 19.1 Reference mark, 27 ft N. and 36.8 ft E. of centerline of road at drive E. and 117 ft N. and 79.3 ft E. of tablet, a copper nail and washer in the top of a tree stump 1199.80

OELWEIN NO. 1 QUAD. - 214

- 64 19.1 West Union at the junction of U.S. Hwy. 18 and State Hwy. 150, 2 mi N. and 4 mi E. of T. 95 and 94 N., R. 8 W., near the quarter cor. between secs. 1 and 36, 25.5 ft S. and 42.5 ft W. of; and same elevation as centerline of road at field entrance W., 90 ft S. and 42.5 ft W. of centerline of road at a drive E. at crest of road and 2 ft S. of a power pole, set on top of a 0.5-in. copper coated steel rod which is enclosed by a 6-in. tile, a standard tablet stamped "12 CDL 1977" 1199.860
- 18 and State Hwy.
- 67 20.3 West Union, at the junction of U.S. Hwy. 150, 1.75 mi N. and 3.25 mi E. of T. 94 N., R. 8 W., in the NE. corner of sec. 2, .21 mi E. of Turkey Triangular Station 80.5 ft S. and 136.6 ft E. of; and 2.5 ft lower than T-rd. N., 1 ft N. and 136.6 ft E. of a right-of-way fence corner and 1 ft N. of a metal witness post, set in the top of a concrete post set flush with ground a standard N.G.S. disk stamped "TURKEY AZIMUTH NO 2 1976" 1221.165

OELWEIN NO. 2 QUAD. - 215

- 69 20.5 Clermont, about 5 mi W. of; about 3.5 mi NE. of West Union, in the NW¼ sec. 14 (probably sec. 2), T. 94 N., R. 9 W., and is on property of Mr. Clyde Blunt, 13.5 ft N. of NE. corner of frame chicken house, 74 ft NW. of NW. corner of brick house and 17 ft S. of an E.-W. row of fir trees; monument is flush and the USC&GS Triangulation Station disk is stamped "TURKEY 1961" 1228.036