

OFFICE COPY HOLD

THIRD-ORDER LEVELS
NATIONAL GEODETIC VERTICAL DATUM OF 1929


UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Henderson and Warren Counties, Illinois
Des Moines and Louisa Counties, Iowa

41-090-33
KEITHSBURG QUADRANGLE
44 - IOWA
215 - ILLINOIS
N4100-W9045/15
DIAGRAM NK 15-9
DAVENPORT

Edition of: 7-18-79

PR: ADP/cb

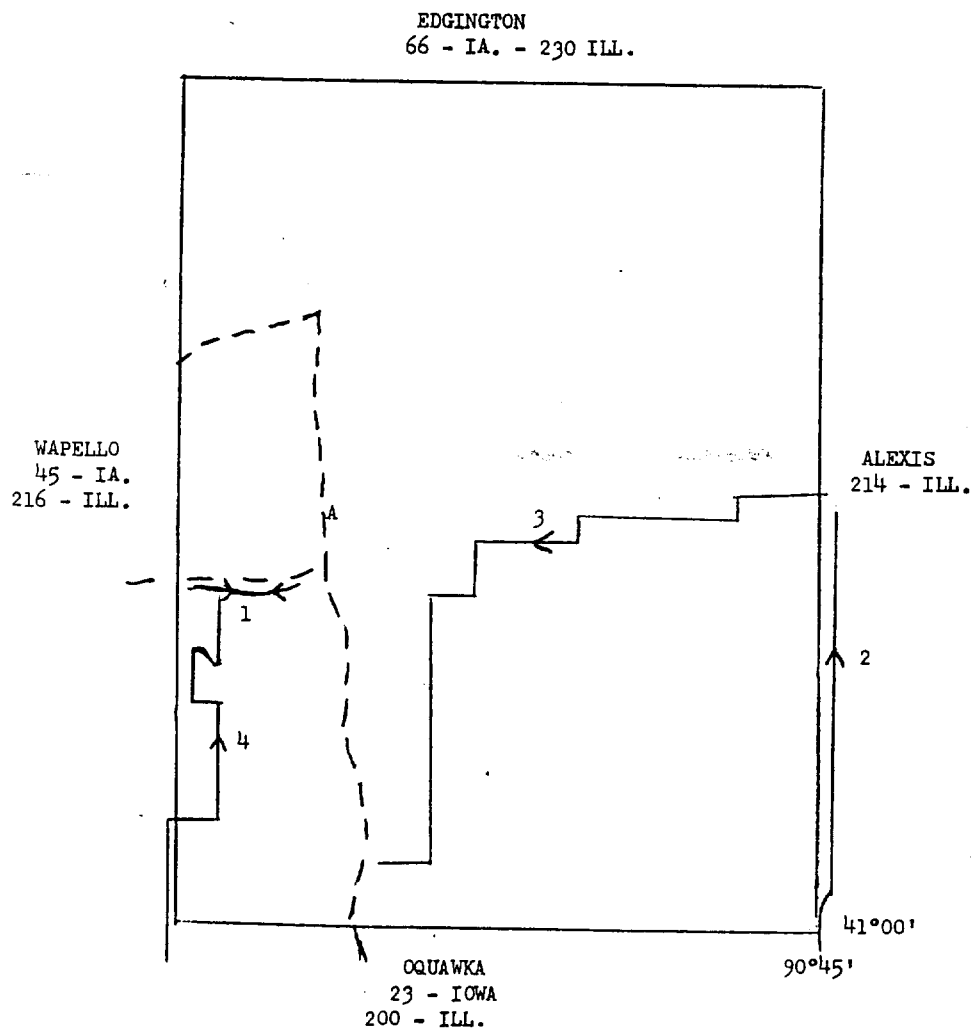

N.G.S. (USC&GS) VERTICAL CONTROL DATA

Quadrangle No. 410903

44.D

2
41-090-33
KEITHSBURG QUADRANGLE
44 - IOWA
215 - ILLINOIS

LINE 1

FEET

D.R. Lucas, 1964; Book CV-1752

WAPELLO QUAD. - 45

- | | | |
|-----|---|---------|
| 0.0 | UE 11 A.; 1 mi S. along Hwy. 99 from tablet, 1 mi W. of Oakville, in center of bridge over Iowa River; a chiseled square | 560.0 |
| 1.1 | Oakville, at intersection of Main Street and M. & SL. RR., 17 ft N. and 35 ft W. of center of street and RR. track, in a concrete post; a standard tablet stamped "12 DRL 1964" | 542.662 |
| 1.1 | Reference mark, 155 ft N. of tablet, 172 ft N. and 24 ft W. of intersection of RR. track at Main Street, on SE. cor. of a concrete sidewalk; chiseled square | 541.09 |
| | <u>KEITHSBURG QUAD. - 44</u> | |
| 4.2 | Oakville, 3 mi E. of; near cor. secs. 20, 21, 28 and 29, T. 73 N., R. 1 W., 88 ft E. and 1.6 ft lower than county road intersection; 5 ft N. of a fence corner; in concrete post; a standard tablet stamped "13 DRL 1964" | 530.977 |
| 4.2 | Reference mark, 78 ft SW. of tablet, 46 ft S. and 18 ft E. of center of intersection of county road, in SW. end of 24-in. metal culvert; a punched hole | 530.95 |

LINE 2

R.L. Johnson, 1978; Book CV-3454

MONMOUTH QUAD. - 199

- | | | |
|-----|--|---------|
| 6.2 | Reference mark, about 420 ft NNE. of tablet, 454 ft N. and 23 ft E. of crossroads; on N. end concrete headwall; a chiseled square | 750.23 |
| 7.2 | UE 18 RLJ A, about 1.1 mi N. of tablet; near cor. secs. 8, 9, 16 and 17, T. 11 N., R. 3 W., about 0.1 mi NE. of crossroads and in grain elevator complex; 45 ft N. and 11 ft E. of NW. cor. of truck scale NW. cor. of concrete base of large electrical switch box, a chiseled square | 737.09 |
| 8.1 | UE 18 RLJ B, about 1.8 mi N. of tablet; near N. sixteenth cor. between secs. 8 and 9, T. 11 N., R. 3 W.; 274 ft N. and 32 ft W. of T-rd. E.; on S. end of W. concrete headwall, a chiseled square | 706.78 |
| 8.8 | UE 18 RLJ C, about 2.5 mi N. of tablet; near quarter cor. between secs. 4 and 5, T. 11 N., R. 3 W.; 28 ft N. and 79 ft E. of T-rd. E., 1 ft SW. of fence corner; on top of hwy. right-of-way marker, a chiseled square | 702.30 |
| 9.4 | BM, Little York, about 1.9 mi S. of; about 0.1 mi N. of cor. secs. 4, 5, 32 and 36, T. 11 and 12 N., R. 3 W.; at concrete bridge; 22 ft E. of centerline of road; on top of SE. wingwall, a standard tablet stamped "19 RLJ 1977" | 621.282 |
| 9.4 | Reference mark, about 150 ft NW. of tablet, 126 ft N. and 37 ft W. of centerline of bridge; on W. end of metal culvert; a punched hole | 615.57 |
| 9.8 | UE 19 RLJ A, about 0.4 mi N. of tablet; near quarter cor. between secs. 32 and 33, T. 12 N., R. 3 W., 28 ft S. and 45 ft E. of crossroads; on top of concrete hwy. right-of-way marker, a chiseled square | 656.74 |

ALEXIS QUAD. - 214

- | | | |
|------|--|--------|
| 10.8 | UE 19 RLJ B, about 1.4 mi N. of tablet; near quarter cor. between secs. 28 and 29, T. 12 N., R. 3 W., at concrete bridge; 22 ft N. and 15 ft E. of centerline of bridge; on E. end of N. wingwall; a chiseled square | 603.32 |
| 11.5 | UE 19 RLJ C, at Little York; 0.5 block SE. of cor. of Main street and Broadway; at E. side of NE. footing for city water tower; a chiseled square | 621.57 |

3
41-090-33
KEITHSBURG QUADRANGLE
44 - IOWA
215 - ILLINOIS

LINE 2 (Cont'd)

ALEXIS QUAD. - 214

FEET

- | | | | |
|------|------|---|---------|
| 6 35 | 11.7 | UE 19 RLJ D, 0.25 mi N. of Little York; near S. sixteenth cor. between secs. 20 and 21, T. 12 N., R. 3 W.; 89 ft S. and 12 ft W. of centerline of bridge, on SW. wingwall, a chiseled square | 599.84 |
| 38 | 12.5 | Reference mark, about 101 ft WNW. of tablet; 35 ft S. and 45 ft W. of crossroads, on S. end of concrete culvert; a chiseled square | 615.92 |
| 39 | 12.6 | BM, Little York, 1 mi N. of; near cor. secs. 16, 17, 20 and 21, T. 12 N., R. 3 W., 56 ft S. and 50 ft E. of crossroads (jct. Hwys. 94 and 135), 10 ft SE. of power pole; on top of copper coated steel rod and inside 5-in. diameter clay tile, a standard tablet stamped "20 RLJ 1977" | 618.291 |
| 41 | 13.6 | UE 20 RLJ A, about 1 mi N. of tablet; near cor. secs. 8, 9, 16 and 17, T. 12 N., R. 3 W., 15 ft S. and 40 ft E. of T-rd. E.; on E. end of S. concrete headwall; a chiseled square | 604.76 |
| 45 | 14.6 | UE 20 RLJ B, about 2 mi N. of tablet; near cor. secs. 4, 5, 8 and 9, T. 12 N., R. 3 W., 14 ft S. and 40 ft W. of T-rd. W., on W. end of S. concrete headwall; a chiseled square | 606.61 |
| 47 | 15.6 | BM, Little York, about 4 mi N. of; near cor. secs. 4, 5, 32 and 33, T. 12 and 13 N., R. 3 W.; at junctions of Hwy. 94 and Hwy. 135 E.; 98 ft S. and 50 ft E. of crossroads; 11 ft N. of a 10-in. diameter cedar tree; on top of copper coated steel rod, driven to a depth of 10 ft and set inside 5-in. clay tile, a standard tablet stamped "21 RLJ 1977" | 610.525 |
| 4 | 15.7 | Reference mark, about 135 ft NE. of tablet; 30 ft S. and 164 ft E. of crossroads; on S. end of concrete culvert; a chiseled square | 608.99 |
| 51 | 17.2 | UE 21 RLJ A, about 1.5 mi N. of tablet; near quarter cor. between secs. 28 and 29, T. 13 N., R. 3 W., 107 ft S. and 21 ft E. of centerline of T-rd. W. (road E. is slightly offset) in center of N. headwall; a chiseled square | 630.82 |
| 55 | 18.1 | Reference mark, about 110 ft SW. of tablet; 51 ft S. and 15 ft W. of centerline of bridge; on top of SW. wingwall; a chiseled square | 608.51 |
| 56 | 18.1 | BM, Little York, about 6.5 mi N. of; about 0.15 mi S. of quarter cor. between secs. 20 and 21, T. 13 N., R. 3 W., at bridge on "North Henderson Creek"; 51 ft N. and 13 ft E. and 1.5 ft lower than centerline bridge, on top of bridge abutment, a standard tablet stamped "22 RLJ 1977" | 606.919 |
| 58 | 18.9 | UE 22 RLJ A, about 0.75 mi N. of tablet, about 0.1 mi N. of cor. secs. 16, 17, 20 and 21, T. 13 N., R. 3 W., about 585 ft N. and 20 ft E. of crossroads; on top of E. headwall; a chiseled square | 634.45 |
| 60 | 19.8 | BM, Aledo, 5 mi S. and 0.5 mi E. of; near cor. secs. 8, 9, 16 and 17, T. 13 N., R. 3 W.; 34 ft S. and 69 ft E. of crossroads; about 1 ft N. of fence; on top of copper coated steel rod, driven to a depth of 10 ft and set inside a 6-in. diameter clay tile, a standard tablet stamped "23 RLJ 1977" | 671.641 |

LINE 3

B.A. Bauch, 1978; Book CV-3456

ALEXIS QUAD. - 214

- | | | | |
|------|-----|---|---------|
| 4 11 | 0.0 | BM, Aledo, 5 mi S. and 0.5 mi E. of; near cor. secs. 8, 9, 16 and 17, T. 13 N., R. 3 W., 34 ft S. and 69 ft E. of crossroads; about 1 ft N. of fence; on top of copper coated steel rod, driven to a depth of 10 ft and set inside of a 6-in. diameter clay tile; a standard tablet stamped "23 RLJ 1977" | 671.641 |
|------|-----|---|---------|

4
41-090-33
KEITHSBURG QUADRANGLE
44 - IOWA
215 - ILLINOIS

LINE 3 (Cont'd)

KEITHSBURG QUAD. - 215

FEET

- 4 12 1.1 UE 23 RLJ AA, about 1 mi W. of BM, in the NE. cor. of sec. 18, T. 13 N., R. 3 W., 17 ft S. and 320 ft W. of centerline of crossroads, at a field entrance S. on the W. end of the S. metal culvert, a punched hole 651.33
- 17 2.7 UE 23 RLJ BB, about 0.5 mi S. and 2.25 mi W. of BM, 0.25 mi W. of quarter cor. secs. 13 and 18, T. 13 N., Rs. 3 and 4 W., 17 ft S. and 866 ft W. of centerline crossroad, 17 ft N. of right-of-way fence, on S. end of a metal culvert; a punched hole 638.71
- 19 3.6 BM, Seaton, about 1.5 mi N. of, at the quarter cor. of secs. 13, and 14, T. 13 N., R. 4 W., at a crossroads, 35 ft N., 30 ft E. of centerline crossroads, 3 ft NW. of right-of-way fence corner post, 5 ft N. of utility pole, set on a copper rod in a 6-in. tile, a standard tablet stamped "19 BAB 1977" 644.801
- 20 3.6 Reference mark, about 80 ft W. of BM, 32 ft N. and 55 ft W. of centerline crossroads, 10 ft W. of utility pole, 1.5 ft S. of right-of-way fence, in a 6-in. tile; a copper rod 646.84
- 22 4.4 UE 19 BAB A, about 1 mi W. of BM, near the quarter cor. of secs. 14 and 16, T. 13 N., R. 4 W., about 0.2 mi E. of crossroads, at a farm drive S., 21 ft S. and 17 ft W. of T-drive S., on the W. end of S. metal culvert; a punched hole 655.93
- 24 5.6 UE 19 BAB B, about 2 mi W. of BM, near quarter cor. of secs. 15 and 16, T. 13 N., R. 4 W., 0.1 mi E. of crossroad, at field gate S., 15 ft S. and 82 ft E. of T-drive S., 15 ft N. and 2 ft W. of right-of-way fence corner post, at a field gate S., on the W. end of S. metal culvert; a punched hole 661.58
- 28 6.9 BM, Keithsburg, 1 mi N. and 4.25 mi E. of, in the SW. cor. of sec. 16, T. 13 N., R. 4 W., 22 ft N. and 15 ft E. of centerline of T-drive N., set in the SE. end of the SE. concrete wingwall, a standard tablet stamped "20 BAB 1977" 593.842
- 29 6.9 Reference mark, about 153 ft W. of BM, on the S. end of a concrete headwall, a chiseled square 591.86
- 31 8.0 UE 20 BAB A, about 1.25 mi W. of BM, in the SW. cor. of sec. 17, T. 13 N., R. 4 W., 23 ft N. and 2.5 ft W. of centerline of field entrance N., 4 ft from W. edge of concrete slab, on the concrete slab laying across the ditch, a chiseled square 571.91
- 33 8.8 UE 20 BAB B, about 0.5 mi S. and 1.5 mi W. of BM, at quarter cor. of secs. 19 and 20, T. 13 N., R. 4 W., 65 ft S. of centerline of T-drive W., at the centerline of T-rd. E., a nail and washer 574.82
- 37 10.3 BM, Keithsburg, 2.2 mi E. of, near SW. cor. secs. 19, T. 13 N., R. 4 W., in NE. angle of offset crossroads, 30 ft N. and 45 ft E. from junction of T-rd. E., 25 ft E. of fence corner, standard iron post with bronze cap stamped "1921 564" 564.013
- 40 11.4 UE PTS 1921 564 A, about 1 mi S. of BM, at the cor. of secs. 25, 30, 31 and 36, T. 13 N., Rs. 4 and 5 W., in the SW. angle of T-drive W., 27 ft S. and 19 ft W. of centerline of T-dr. W., 2 ft S. and 3 ft E. of right-of-way fence corner post, set in a 6-in. tile, a copper rod 565.81
- 42 12.5 UE 1921 564 B, about 2 mi S. of BM, at the NE. corner of sec. 1, T. 12 N., R. 5 W., on the NE. corner of forested area, 150 ft S. and 26 ft W. of centerline of T-rd. W. on the S. end of a concrete step to an old building, a chiseled square 565.76
- 14.0 UE 1921 564 C, about 3.5 mi S. of BM, near the quarter cor. of secs. 7, 12, T. 12 N., Rs. 4 and 5 W., in SW. angle of T-rd. W., 30 ft S. and 26 ft W. of centerline of T-rd. W., 2 ft S. and 2 ft E. of right-of-way fence corner post, set in a 6-in. tile; a copper rod 564.13

LINE 3 (Cont'd)

KEITHSBURG QUAD. - 215

FEET

- 4 48 14.1 Reference mark No. 2, Keithsburg, about 3.75 mi S. and 2 mi E. of, just S. of quarter cor. secs. 7 and 12, T. 12 N., Rs. 4 and 5 W., 645 ft S. and 16 ft E. of centerline T-rd. W., 4 ft W. of right-of-way fence, on the E. edge of gravel road, a USC&GS standard disk stamped "BALD BLUFF REFERENCE MARK 2 1931" 564.22
- 51 15.2 UE 1921 564 D, about 4.75 mi S. of BM, just S. of quarter cor. of secs. 13 and 18, T. 12 N., R. 4 and 5 W., in the NW. angle of T-rd. W., 45 ft N. and 23 ft W. of centerline of T-drive W., 2.5 ft E. of right-of-way fence, set in a 6-in. tile, a copper rod 559.71
- 54 16.0 UE 1921 564 E., about 5.5 mi S. of BM, at the quarter cor. of secs. 19 and 24, T. 12 N., Rs. 4 and 5 W., in the NW. angle of crossroads, 23 ft N. and 22 ft W. of centerline of crossroads, 8 ft N. and 1.5 ft E. of right-of-way fence corner post; set in a 6-in. tile, a copper rod 569.60
- 59 17.0 PTS, Keithsburg, 5.5 mi S. and about 0.5 mi E. of, near quarter cor. of secs. 23 and 24, T. 12 N., R. 5 W., 0.3 mi E. of junction of the Keithsburg-Oquawaka asphalt and a T-rd. E., at the old RR. station of Milroy; near an old abandoned RR. grade, now a trail N. and old grade S.; in the S. end of a dirt bank; 25 ft N. and 50 ft W. of E.-W. road, and old grade crossing, flush with the ground; a standard tablet set in concrete post; stamped "PTS NO. 34 W 1923" 565.373

LINE 4

Clayton, 1979; Book CV-3480

BURLINGTON QUAD. - 201 ILL. - 24 IA.

- 1 19 6.2 BM, Kingston, 1.5 mi E. of, near quarter cor. between secs. 5 and 6, T. 71 N., R. 1 W., 189 ft N. of T-rd. SE., 38 ft W. centerline road, 1 ft E. of fence, 1.8 ft W. of power pole, on top of copper coated steel rod, inside 6-in. plastic pipe flush with ground, a standard tablet stamped "1 PC 1978" 520.505
- 21 6.6 UE 1 A, 0.45 mi N. along gravel road from BM, near cor. secs. 5, 6, 31 and 32, T. 71 and 72 N., R. 1 W., 50 ft S., 31 ft E. and 3.6 ft lower than crossroad, on S. end of concrete culvert; a chiseled square 524.53
- 23 7.1 UE 1 B, 1 mi N. along gravel road from tablet, near quarter cor. between secs. 31 and 32, T. 72 N., R. 1 W., 12 ft N. and 24 ft W. of road at field entrance W. on N. end of round concrete culvert; a chiseled square 529.83
- 25 7.6 UE 1 C, 1.5 mi N. along road from tablet near cor. secs. 29, 30, 31 and 32, T. 72 N., R. 1 W., 12 ft S. and 27 ft W. of road at field entrance W., on S. end of round concrete culvert; a chiseled square 529.99

WAPELLO QUAD. - 216 ILL. 45 - IA.

- 27 8.2 UE 1 D, 2 mi N. along gravel road from tablet, near quarter cor. between secs. 29 and 30, T. 72 N., R. 1 W., 36 ft S., 75 ft W., and 1.6 ft lower than crossroad, on NE. cor. concrete curb around scale platform; chiseled square 531.15
- 29 9.2 BM, Kingston, 3 mi N. and 1.5 mi E. of near quarter cor. between secs. 19 and 20, T. 72 N., R. 1 W., 150 ft S., 12 ft E. and level with centerline bridge 1 ft S. of N. end of SE. cor. wingwall of bridge, on concrete curb, a standard tablet stamped "2 PC 1978" 548.894
- 31 9.3 Reference mark, 300 ft NNE. of tablet, 150 ft N. and 13 ft W. centerline of bridge, on top of W. concrete wingwall of bridge, a chiseled square 550.86
- 33 9.7 UE 2 A, 0.5 mi N. along gravel road from tablet, near cor. secs. 17, 18, 19 and 20, T. 72 N., R. 1 W., 30 ft S., 24 ft E. and 1.7 ft lower than T-rd. E., on W. end of round concrete culvert, under field entrance; a chiseled square 526.34

LINE 4 (Cont'd)

KEITHSBURG QUAD. - 215 ILL. 44 IA.

FEET

- | | | | | |
|----|------|--|--|--------|
| 1 | 35 | 10.3 | UE 2 B, 0.5 mi N. thence 0.5 mi E. along gravel road from tablet, near quarter cor. between secs. 17 and 20, T. 72 N., R. 1 W., 10 ft S., 15 ft E. and 1.8 ft lower than centerline bridge on S. end of steel I-beam; a chiseled cross | 532.39 |
| 38 | 11.3 | UE 2 C, 0.5 mi N. thence 1 mi E. thence 0.5 mi N. along gravel road from tablet, near quarter cor. between secs. 16 and 17, T. 72 N., R. 1 W., 11 ft N. 24 ft E. and 3.8 ft lower than road at field entrance E., on N. end of metal pipe culvert; a punched hole | 527.82 | |
| 40 | 11.8 | BM, Kingston, 4.5 mi N. and 2.5 mi E. of, 3.5 mi S. and 3 mi E. of Oakville, near cor. secs. 8, 9, 16 and 17, T. 72 N., R. 1 W., 109 ft N., 32 ft E. and 3 ft lower than crossroad, 2.2 ft N. of power pole, 1 ft W. of fence on top of copper-coated steel rod inside 6-in. plastic tile flush with ground, a standard tablet stamped "3 PC 1978" | 532.590 | |
| 41 | 11.9 | Reference mark, 380 ft N. of tablet, 489 ft N. and 32 ft E. of crossroad, 0.5 ft W. of fence, 2.5 ft W. of and in line with power pole E. of fence, top of 0.5-in. steel rod, flush with ground | 533.27 | |
| 43 | 13.1 | UE 3 A, 1.25 mi N. along gravel road from tablet, near S. sixteenth cor. between secs. 4 and 5, T. 72 N., R. 1 W., 20 ft W. and 3 ft lower than road at drain, 5.9 ft above water on W. end of steel pipe culvert; a punched hole | 530.06 | |
| 47 | 14.3 | BM, Oakville, 1.75 mi S. and 2.5 mi E. of near quarter cor. between secs. 5 and 32, T. 72 and 73 N., R. 1 W., 14 ft N., 14 ft W. and 0.4 ft higher than centerline bridge, 1 ft S. of N. end of W. concrete curb of bridge, a standard tablet stamped "4 PC 1978" | 535.061 | |
| 48 | 14.3 | Reference mark, 55 ft NE. of tablet, 55 ft N. and 22 ft E. centerline of bridge, 15 ft N. and 22 ft E. centerline road at field entrance E., on N. end of metal pipe culvert under field entrance, a punched hole | 531.95 | |
| 51 | 15.4 | UE 4 A, 1.1 mi N. along road from tablet approx. 0.1 mi N. of quarter cor. between secs. 29 and 32, T. 73 N., R. 1 W., 13 ft N., 12 ft W. and 0.0 ft higher than centerline bridge, 1.5 ft N. and 1 ft W. of NW. cor. bridge in top of wooden piling of wingwall, a RR. spike | 530.28 | |
| 53 | 15.9 | UE 4 B, 1.1 mi N. thence 0.5 mi E. along gravel road from tablet near cor. secs. 28, 29, 32 and 33, T. 73 N., R. 1 W., 53 ft S., 44 ft W. and 1.3 ft lower than road at curve, 33 ft S. of road W., 1.5 ft N. of fence, 1.2 ft S. of power pole in plastic tile, top of 0.5 in. steel rod | 531.53 | |
| 54 | 16.9 | BM, Oakville, 3 mi E. of; near cor. secs. 20, 21, 28 and 29, T. 73 N., R. 1 W., 88 ft E. and 1.6 ft lower than county road intersection; 5 ft N. of a fence corner, in concrete post, a standard tablet stamped "13 DRL 1964" | 530.977 | |

7
41-090-33
KEITHSBURG QUADRANGLE
44 - IOWA
215 - ILLINOIS

FEET

ISOLATED BENCH MARKS

Aledo, 3.8 mi W. of, 3 mi E. of Joy, 50 ft NE. of crossing of N.-S. road, 2.5 ft SW. of corner of right-of-way fence; in concrete post; standard tablet stamped "29 S 1923"	702.224
Joy, in NW. cor. of schoolyard, in SE. angle of crossroads, in concrete post; standard tablet stamped "30 S 1923"	688.030
Arpee Station, 0.25 mi N. of, near $S\frac{1}{4}$ cor. sec. 22, T. 14 N., R. 5 W., 27 ft N. and 25 ft E. from junction of T-rd. S., 1.5 ft S. of fence, in concrete post; standard tablet stamped "PRIM TRAV STA NO 30 W 1923"	576.602
Keithsburg, in NW. corner of park, 2.5 ft E. of sidewalk, in concrete post; standard tablet stamped "PRIM TRAV STA NO 32 W 1923" (Recovered in 1931) (J.P. Ryan 3-78, said not found)	549.374
Keithsburg, 5.5 mi S. and about 0.5 mi E. of; near the quarter cor. between secs. 23 and 24, T. 12 N., R. 5 W., 0.3 mi E. of the junction of the Keithsburg-Oquawaka asphalt at T-rd. E. at the old RR. station of Milroy, near an old abandoned RR. grade now a trail N. and old grade S. end of a dirt bank, 25 ft N. and 50 ft W. of E.-W. road and old grade crossing, flush with the ground; a standard tablet set in a concrete post and stamped "PTS NO. 34 W. 1923"	565.373
Keithsburg, 2 mi S. and 1 mi E. from, near N. cor. secs. 1 and 2, T. 12 N., R. 5 W., 35 ft S. and 50 ft W. from crossing C.B. & Q. RR., at corner of fences along W. right-of-way of RR. and S. line of road, in concrete post; standard tablet stamped "PRIM TRAV STA NO 33 W 1923"	578.770
Seaton, 0.7 mi S. of, near $E\frac{1}{4}$ cor. sec. 26, T. 13 N., R. 4 W., in SW. angle of crossroads, on S. side of E.-W. road; standard iron post with bronze cap stamped "1921 660"	659.882
Seaton, 0.2 mi S. and 2.5 mi W. from, 4.7 mi E. of Keithsburg, near $N\frac{1}{4}$ cor. sec. 28, T. 13 N., R. 4 W., 55 ft S. and 25 ft W. from right-angle turn in road from S. to W., 25 ft S. of fence corner; in concrete post; standard tablet stamped "1921 576" (Not found 6-4-54, 2-66, USC&GS I.H.D.)	575.737
Keithsburg, at NE. cor. of intersection of Washington and Seventh Street, on E. side of Seventh St. at W. entrance to high school building, on top of N. end of top concrete step; chiseled square (Recovered 1931)	551.27
Keithsburg, at NW. cor. of intersection of Main and Fifth Streets on N. side of Main Street at entrance to Commercial Hotel, on top of W. end of top concrete step; chiseled square (Recovered 1923)	548.67
Keithsburg, at SW. cor. of intersection of Main and Fourth Streets on S. side of Main Street, at E. side of entrance to Keithsburg Bank, 9 ft W. of NE. cor. of building, on top of W. end of limestone windowsill; chiseled square (recovered in 1931)	541.69
New Boston, 3.1 mi NE. of, 2.3 mi SW. of Mannon, near NE. cor. sec. 20, T. 14 N., R. 5 W., in SW. angle of junction of T-rd. W.; 3 ft S. of fence corner; standard iron post with bronze cap stamped "1921 565"	564.299
Mannon, 0.6 mi NE. of, 330 ft SE. of $W\frac{1}{4}$ cor. sec. 3, T. 14 N., R. 5 W., 330 ft SW. of junction of road S., on W. side of road, at NE. corner of Mannon Cemetery, at N. end of hitching rack and iron fence in front of cemetery; standard iron post with bronze cap stamped "1921 586"	585.188
Aledo, 2.1 mi S. of, at Kimmel School, near $S\frac{1}{4}$ cor. sec. 29, T. 14 N., R. 3 W., in NE. angle of crossroads; in SW. corner of schoolyard, on SW. corner of concrete platform of well; chiseled square	706.39
Aledo, 0.1 mi S. of, near $N\frac{1}{4}$ cor. sec. 5, T. 13 N., R. 3 W., 30 ft S. and 55 ft from junction of T-rd. W. corner of yard of dwelling, 5 ft E. of fence corner; standard iron post with bronze cap stamped "EB 1921 692" and "PRIM TRAV STA NO 21 W 1923"	691.675