


Mills and Pottawattamie Counties

Retyped 6/23/67
PR: SB/mp

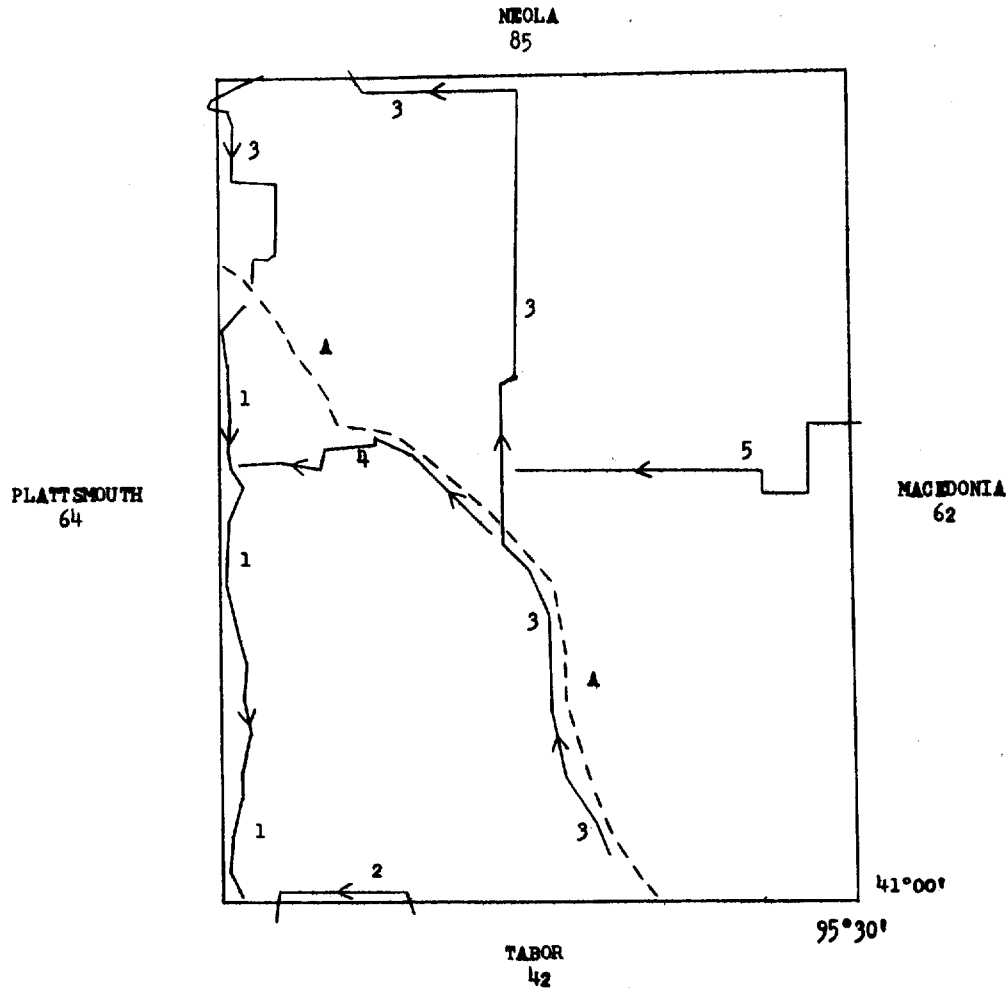

USCAGS LEVELING

A. Quadrangle No. 410953, supplementary adjustment of 1953

LINE 1Feet

GENERALLY SOUTH ALONG WEST BORDER (by R. E. Carey, 1955; Book CV 676)

1.2	T. 74 N., R. 43 W., near the center of sec. 24, center of County Rd. "A", at T-rd. S.	1285.0
1.9	Mineola, 3.0 mi N. and 2.5 mi W. of, at old Dumfries Siding in N. central portion of secs. 25, T. 74 N., R. 43 W.; 95 ft S. of W. end of Wabash Railroad overpass, 1 ft E. of the Wabash RR. right-of-way fence, in concrete post; standard tablet stamped "1 RC 1955 1254"	1254.321
1.9	Reference mark; 95 ft N. of tablet, at NW. end of RR. overpass, in W. end of wooden curb about 8 inches higher than road; a copper nail and washer, painted "RM"	1257.56
2.6	T. 74 N., R. 43 W.; in SW $\frac{1}{4}$ sec. 25, near center of curve at drain NW.	1254.9
3.3	T. 74 N., R. 43 W.; near E. 1/16 cor. between secs. 26 and 35, center of N.-S. rd. at rd. leading E., thence NE.	1257.5
4.0	T. 74 N., R. 43 W., in SW $\frac{1}{4}$ sec. 35, center of rd. angle at clear strip SW.	1296.3
4.4	Center of rd. at T-rd. W., 300 ft N. and 37 ft W. of "2 RC"	1186.7
4.4	Mineola, 1.0 mi N. and 3.0 mi W. of, at Mills-Pottawattamie County line, 300 ft S. and 37 ft E. of T-rd. W. which is near cor. secs. 1, 2, 35 and 36; T. 73 and 74 N., R. 43 W., 100 ft S. and 37 ft E. of rd., at S. end bridge, 14 ft S. of a private drive E., 1 ft W. of fence line, in concrete post; standard tablet stamped "2 RC 1955 1187"	1186.803
4.4	Reference mark; 132 ft N. and 27 ft W. of tablet, at NE. end of wooden bridge, in the E. end of the N. abutment about 0.4 inches lower than rd., copper nail and washer painted "RM"	1187.14
4.9	T. 73 N., R. 43 W., near quarter cor. between secs. 1 and 2, center of rd. at T-fence W.	1235.1
5.4	T. 73 N., R. 43 W., near cor. secs. 1, 2, 11 and 12, center of rd. at T-rd. E.	1270.3
5.9	T. 73 N., R. 43 W., near quarter corner between secs. 11 and 12, center of rd., in line with T-rd. W.	1262.0
6.4	T. 73 N., R. 43 W., near cor. secs. 11, 12, 13 and 14, center of rd. at T-rd. N.	1252.7
6.7	Mineola, 1.0 mi S. and 2.75 mi W. of, 27 ft N. and 166 ft W. of T-rd. S., which is near W. 1/16 cor. between secs. 12 and 13, T. 73 N., R. 43 W., 1 ft S. of fence line, in concrete post; standard tablet stamped "3 RC 1955 1261"	1260.856
6.7	Reference mark; about 100 ft SW. of tablet, 20 ft S. of center of road, on S. end of pipe culvert; painted square painted "RM"	1258.65
6.8	Center of rd. at T-rd. S., 27 ft S. and 166 ft E. of "3 RC"	1261.1
7.2	T. 73 N., R. 43 W., in the SE $\frac{1}{4}$ NW $\frac{1}{4}$ sec. 13, center of rd. at T-fence E.	1228.6
7.9	T. 73 N., R. 43 W.; near cor. secs. 13, 14, 23 and 24, center of rd. at T-fence E.	1244.0
8.7	Rd. angle at T-rd. W., about 650 ft N. of "4 RC"	1123.0

<u>Line 1 Cont'd.</u>	<u>Feet</u>
8.8 Mineola, 3.0 mi S. and 3.0 mi W. of, 4.0 mi N. of Glenwood; in SE. cor. sec. 23, T. 73 N., R. 43 W.; about 650 ft S. of rd. angle at T-rd. W., 85 ft N. and 40 ft E. of center of rd. at culvert, 19 ft N. and 40 ft E. of rd. at field drive E., 1 ft W. of fence line, in concrete post; standard tablet stamped "4 RC 1955 1111"	1111.233
8.9 Reference mark; 85 ft S. and 58 ft W. of tablet, on W. end of pipe culvert; painted square, painted "RM"	1111.44
9.6 T. 73 N., R. 43 W.; near quarter corner between secs. 25 and 26, center of crossroads	1158.2
10.1 T. 73 N., R. 43 W.; near corner between secs. 25, 26, 35 and 36, center of rd. at T-rd. E.	1206.9
10.6 T. 73 N., R. 43 W.; in SW $\frac{1}{4}$ sec. 36, center of rd. at T-fence E.	1207.9
11.0 Glenwood, 2.0 mi N. of, 141 ft N. and 34 ft E. of T-rd. E. which is near W. 1/16 cor. between secs. 1 and 36, Ts. 72 and 73 N., R. 43 W.; 40 ft S. of the SE. corner of a concrete block building in concrete post, standard tablet stamped "5 RC 1955 1177"	1176.567
11.0 Reference mark; about 100 ft NW. of tablet, 54 ft E. of center of rd., 1 ft W. of NW. corner of building, on concrete slab; chiseled square, painted "RM"	1177.51
11.1 Center of rd. at T-rd. E., 141 ft S. and 34 ft W. of "5 RC"	1161.5
11.4 T. 72 N., R. 43 W.; in NW $\frac{1}{4}$ sec. 1, center of rd. at culvert	1053.6
12.0 T. 72 N., R. 43 W.; near W. 1/16 cor. between secs. 1 and 12, center of rd. at culvert	1048.0
12.7 Glenwood, at NE. edge of, in SW $\frac{1}{4}$ sec. 12, T. 72 N., R. 43 W.; 3 blocks E. of Hwy. 275, 27 ft S., 20 ft W. and 43 ft higher than center of Fourth and Linn Streets, 3 ft S. and 2 ft W. of a telephone pole, in concrete post; standard tablet stamped "6 RC 1955 1036"	1035.372
12.7 Reference mark; 74 ft N. and 35 ft E. of tablet, 47 ft N. and 15 ft E. of center of Fourth and Linn Streets, on SE. corner of concrete post, about 1.5 ft above ground, painted square	1032.46
13.5 T. 72 N., R. 43 W.; in N. portion of sec. 13, on Hwy. 34, 100 ft N. of Green Street, center of bridge, 17.9 ft above water level - 3/24/55, painted square	988.0
14.0 T. 73 N., R. 43 W.; in NW $\frac{1}{4}$ sec. 13, center of bridge over canal, painted square, 27 ft above water level - 3/24/55	987.8
14.5 Glenwood, 1.0 mi S. and 0.25 mi W. of, near cor. secs. 13, 14, 23 and 24, T. 72 N., R. 43 W.; 390 ft NW. of Chicago, Burlington and Quincy RR. underpass, 210 ft SE. of S. end of a bridge, 49 ft E. of center of rd., on the inside of a curve, 3 ft E. of a telephone pole, in concrete post; standard tablet stamped "7 RC 1955 986"	985.608
14.5 Reference mark; 210 ft NW. of tablet, at SW. end of bridge, on the concrete abutment about 0.5 ft lower than the road, chiseled square, painted "RM"	983.18
15.1 T. 72 N., R. 43 W.; near quarter corner between secs. 23 and 24, center of rd. at E.-W. fence line	1080.4
15.6 T. 72 N., R. 43 W.; near cor. secs. 23, 24, 25 and 26, center of crossroads	1053.5

4
Glenwood Quadrangle
63 - Iowa

Line 1 Cont'd.

	<u>Feet</u>
16.1 T. 72 N., R. 43 W.; about 300 ft W. quarter corner between secs. 25 and 26, center of rd. at T-fence W.	1075.3
16.6 Glenwood, 3.0 mi S. of, 299 ft NW. along rd., thence 34 ft W. of T-rd. W. which is near E. 1/16 cor. between secs. 25 and 36, T. 72 N., R. 43 W.; 2 ft S. and 1 ft E. of a telephone pole, in concrete post; standard tablet stamped "6 RC 1955 1926"	1025.701
16.6 Reference mark; about 270 ft SE. of tablet, 22 ft E. of center of rd., on N. end of E. headwall of culvert; chiseled square, painted "RM"	1022.18
16.7 Center of rd. at T-rd. W., 299 ft SE. along rd., thence 34 ft E. of "6 RC"	1021.8
17.1 T. 72 N., R. 43 W.; near E. 1/16 cor. between secs. 26 and 35, center of rd. at T-fence S.	959.7

LINE 2

GENERALLY WEST ALONG WEST PORTION OF SOUTH BORDER (by R. E. Carey, 1955; Book CV 676)

0.0 At Malvern, Mills County, at the NW. corner of the intersection of First Avenue and Fifth Street, at the Liberty Memorial Community Building, in the E. wall, 15 ft S. of the center of the entrance, and 3 ft above the ground, a standard disk stamped "MALVERN 1934" and set vertically (Recovered in good condition 3/30/55)	1018.193
0.6 T. 72 N., R. 41 W.; near the center of sec. 32, center of rd. at T-rd. W.	1000.5
5.8 T. 72 N., R. 42 W., near cor. secs. 27, 28, 33 and 34, center of Hwy. 275 at T-rd. W.	1207.9
6.2 T. 72 N., R. 42 W.; near quarter corner between secs. 28 and 33, center of rd. at T-fence S.	1222.8
6.6 Malvern, 5.5 mi W. of, 560 ft E. of rd. at N.-S. fence which is near cor. secs. 28, 29, 32 and 33, T. 72 N., R. 42-W.; 31 ft N. and 131 ft W. of the W. end of bridge over Waubensie Creek, 31 ft N. and 31 ft E. of private drive N., 1 ft S. of fence line, in concrete post; standard tablet stamped "12 RC 1955 1131"	1131.169
6.6 Reference mark; 43 ft S. and 131 ft E. of tablet, at SW. corner of bridge over Waubensie Creek, in wooden abutment about 1 ft lower than floor of bridge; copper nail and washer painted "RM" (Water is 26 ft lower-1099.8)	1125.81
6.7 Center of rd. at N.-S. fence, 560 ft W. of "12 RC"	1150.9
7.4 T. 72 N., R. 42 W.; about 0.1 mi W. quarter corner between secs. 29 and 32, center of crossroads	1223.3

LINE 3

GENERALLY NORTH THROUGH CENTER OF QUADRANGLE (by R. E. Carey, 1955; Book CV 676)

0.0 Malvern, 2.1 mi N. along the Wabash Railroad from the station at, Mills County, 7 1/2 poles N. of milepost 387-27, at the overpass of U. S. Hwy. 34, in the E. face of the NW. pillar, 30 ft W. of the center of the track, and about 4 ft above the track. A standard USCGS disk stamped "P 97 1935" and set vertically	1030.923
0.6 T. 72 N., R. 41 W.; in SW 1/4 sec. 18, center of RR. crossing, copper nail and washer	1017.3

<u>Line 3 Cont'd.</u>	<u>Feet</u>
0.8 Center of RR. trestle, in NW $\frac{1}{4}$ sec. 18, T. 72 N., R. 41 W.	1011.6
1.1 T. 72 N., Rs. 41 and 42 W., near cor. secs. 7, 12, 13 and 18; center of old RR. crossing, copper nail and washer	1013.3
1.8 T. 72 N., R. 42 W., in NE $\frac{1}{4}$ sec. 12, center of steel span of RR. bridge; copper nail and washer	1017.7
2.2 Silver City, 3.8 mi SE. of, along Wabash RR., near E. 1/16 cor. between secs. 1 and 12, T. 72 N., R. 42 W.; 41 ft S., 46 ft W. and 0.4 ft lower than the center of the RR. crossing, 3 ft S. and 1 ft E. of corner fence post of Wabash RR. right-of-way fence, in concrete post; standard tablet stamped "14 RC 1955 1016"	1016.538
2.2 Reference mark; about 100 ft NW. of tablet, 30 ft N. of center of rd. in forks on N. side of a box elder tree; copper nail and washer painted "RM"	1016.83
2.2 Center of RR. crossing, 41 ft N. and 46 ft E. of "14 RC"	1016.9
2.6 T. 72 N., R. 42 W., in SE $\frac{1}{4}$ sec. 1, center of RR. trestle, copper nail and washer	1019.4
3.2 Ts. 72 and 73 N., R. 42 W.; near E. 1/16 cor. between secs. 1 and 36, center of RR. crossing; copper nail and washer	1025.2
3.6 T. 73 N., R. 42 W.; near E. central sixteenth cor. sec. 36, center of RR. trestle; copper nail and washer	1042.6
4.1 Silver City, 1.9 mi SE. of, along the Wabash RR. near E. 1/16 cor. between secs. 25 and 36; T. 73 N., R. 42 W.; 177 ft S. and 45 ft W. of the S. end of RR. trestle No. 1260, 3 ft E. of a telephone pole, 4 ft E. of the W. right-of-way fence, in concrete post; standard tablet stamped "15 RC 1955 1031"	1031.312
4.1 Reference mark; 177 ft N. and 45 ft E. of tablet, in the center of the S. end of RR. trestle; copper nail and washer, painted "RM"	1032.14
5.0 T. 73 N., R. 42 W.; near N. central sixteenth cor. sec. 25, center of RR. crossing; copper nail and washer	1033.6
5.7 T. 73 N., R. 42 W.; in SW. cor. sec. 24, center of rd. at private drive W., and field drive E.	1039.4
6.0 At Silver City, Mills County, at the Wabash RR. station, 66 ft W. of the W. side of a water tank, at a rd. crossing, 105 ft W. of the center of the main track, 22 ft N. of the center of the rd., 15 ft W. of the center of the side-track, 10 ft N. of a pole and level with the track. A standard USCGS disk stamped "L 97 1935" and set in the top of a concrete post	1044.417
0.5 T. 73 N., R. 42 W., near E. 1/16 cor. between secs. 14 and 23, center of crossroads	1051.2
1.0 T. 73 N., R. 42 W.; near E. central sixteenth cor. sec. 14, center of rd. at drain	1072.4
1.5 T. 73 N., R. 42 W.; near E. 1/16 cor. between secs. 11 and 14, center of crossroads	1055.3
2.1 "16 RC 1955 1066" (reported destroyed 9/64)	1066.178
2.1 Reference mark; 190 ft S. and 48 ft E. of tablet, in NE. corner of wooden floor of bridge; copper nail and washer, painted "RM"	1067.27

<u>Line 3 Cont'd.</u>	<u>Feet</u>
2.5 T. 73 N., R. 42 W.; near E. 1/16 cor. between secs. 2 and 11, center of rd. at T-rd. W.	1074.1
3.0 T. 73 N., R. 42 W., near E. central sixteenth cor. sec. 2, center of rd. at T-fence W.	1146.8
3.5 Ts. 73 and 74 N., R. 42 W.; 0.25 mi W. of the N. cor. secs. 1 and 2, center of rd. at T-rd. S.	1097.6
3.7 Silver City, 3.5 mi N. of, in the SE. cor. sec. 35, T. 74 N., R. 42 W.; on the inside of a long curve, 93 ft N. and 2.1 ft higher than the center of the rd. at rd. leading SE., 1 ft E. of fence line, in concrete post; standard tablet stamped "17 RC 1955 1150"	1149.434
3.7 Reference mark; 93 ft S. and 38 ft E. of tablet, on NE. end of pipe culvert; painted square, painted "RM"	1148.76
4.2 T. 74 N., R. 42 W.; near quarter cor. between secs. 35 and 36, center of rd. at E.-W. fence line	1211.8
4.7 T. 74 N., R. 42 W., near cor. secs. 25, 26, 35 and 36; center of rd. at T-rd. E.	1180.2
5.1 T. 74 N., R. 42 W.; near quarter corner between secs. 25 and 26, center of rd. at T-fence E.	1219.8
5.6 Silver City, 5.5 mi N. of, 3.0 mi S. and 1.0 mi W. of Traynor, 338 ft S. and 40 ft W. of crossroads, which are near cor. secs. 23, 24, 25 and 26; T. 74 N., R. 42 W.; 150 ft S. and 40 ft W. of private drive W., in concrete post; standard tablet stamped "18 RC 1955 1214 TT " (Reset 1964)	1211.560
5.6 Reference mark; 115 ft N. and 14 ft W. of tablet, 45 ft W. of center of road, on SW. corner of concrete base of well pump; chiseled square, painted "RM"	1205.90
5.7 Center of crossroads, 338 ft N. and 31 ft E. of "18 RC"	1196.5
6.1 T. 74 N., R. 42 W., about 0.1 mi S., quarter corner between secs. 23 and 24, center of bridge	1191.6
6.7 T. 74 N., R. 42 W.; near cor. secs. 13, 14, 23 and 24, center of crossroads	1188.3
7.3 T. 74 N., R. 42 W.; 0.15 mi N. of quarter corner between secs. 13 and 14, center of bridge; copper nail and washer	1111.0
7.7 Center of rd. at T-rd. W.; 490 ft S. and 32 ft E. of "19 RC"	1143.8
7.8 Traynor, 1.0 mi S. and 1.0 mi W. of, 490 ft N. and 32 ft W. of T-rd. W., which is near cor. secs. 11, 12, 13 and 14, T. 74 N., R. 42 W.; 165 ft S. and 32 ft W. of the S. end of bridge, 6 ft N. of a telephone pole, 1 ft E. of fence line, in concrete post; standard tablet stamped "19 RC 1955 1113"	1113.047
7.8 Reference mark; 165 ft S. and 22 ft E. of tablet, at SW. corner of bridge, in the W. end of piling cap 1.5 ft lower than floor of bridge; copper nail and washer	1110.96
8.2 T. 74 N., R. 42 W.; near quarter corner between secs. 11 and 12, center of rd. at E.-W. fence	1107.0
8.5 Center of bridge, 17.6 ft above water level 4/7/55, 0.2 mi S. of cor. secs. 1, 2, 11 and 12, T. 74 N., R. 42 W.	1091.2
8.7 T. 74 N., R. 42 W.; near cor. secs. 1, 2, 11 and 12, center of County Rd. 100, in line with rd. N.	1114.6

<u>Line 3 Cont'd.</u>	<u>Feet</u>
9.3 T. 74 N., R. 42 W., about 0.1 mi NE cor. between secs. 1 and 2, center of rd. at field drives E.-W.	1207.1
9.6 T-rd. E., near cor. secs. 1, 2, 35 and 36, Ts. 74 and 75 N., R. 42 W.	1181.3
9.8 Treynor, 1.1 mi N. and 1.0 mi W. of, 650 ft N. and 32 ft W. of T-rd. E., which is near cor. secs. 1, 2, 35 and 36; Ts. 74 and 75 N., R. 42 W.; 695 ft S. and 32 ft W. of a T-rd. W., 1 ft E. of fence line, in concrete post; standard tablet stamped "20 RC 1955 1196"	1195.352
9.8 Reference mark; about 120 ft S. of tablet, 32 ft W. of center of road, on the head of a rail spike in E. side of telephone pole, painted "RM"	1194.78
9.9 Center of rd. at T-rd. W., 695 ft N. and 32 ft E. of "20 RC"	1176.9
10.2 T. 75 N., R. 42 W.; in SE $\frac{1}{4}$ sec. 35, center of bridge; copper nail and washer, 17.4 ft above water level 4/7/55	1106.7
10.6 T. 75 N., R. 42 W.; in the SW $\frac{1}{4}$ sec. 35, center of rd. at private drive N.	1179.3
10.9 T. 75 N., R. 42 W., near S. 1/16 cor. between secs. 34 and 35, P.I. of rd. corner	1234.2
11.1 Ts. 74 and 75 N., R. 42 W., near cor. secs. 2, 3, 34 and 35, center of rd. at T-rd. W.	1171.2
11.6 Ts. 74 and 75 N., R. 42 W.; near quarter cor. between secs. 3 and 34, center of crossroads	1098.1
12.2 Treynor, 1.0 mi N. and 3.0 mi W. of, near cor. secs. 3, 4, 33 and 34, 29 ft N. and 261 ft W. of W. end of bridge over Keg Creek, 29 ft N. and 231 ft E. of field drive N., 4 ft W. of a powerline pole and 1 ft S. of fence line; in concrete post; standard tablet stamped "21 RC 1955 1063"	1062.763
12.2 Reference mark; 20 ft S. and 364 ft E. of tablet, at NE. corner of bridge over Keg Creek; 9 ft N. and 1 ft lower than center of E. end of bridge, in N. end of piling cap; copper nail and washer (Water is 30.8 ft lower than P.P.) painted "RM"	1062.53
12.7 Ts. 74 and 75 N., R. 42 W.; near quarter corner between secs. 4 and 33, center of bridge; copper nail and washer	1081.4
13.4 Ts. 74 and 75 N., R. 42 W.; near E. 1/16 cor. between secs. 5 and 32, center of rd. at T-rd. E.	1194.0
15.4 T. 75 N., R. 42 W.; in NW $\frac{1}{4}$ sec. 31, center of rd. at private rd. N.	1173.1
16.1 T. 75 N., R. 43 W.; near SE cor. sec. 36, about 100 ft SW. of rd. forks, center of rd. at culvert	1101.1
16.6 Reference mark; about 620 ft NE. of tablet, 23 ft N., center of rd., on N. end of pipe culvert; painted square, painted "RM"	1088.91
16.6 Center of road at N.-S. fence line, 34 ft N., thence 365 ft NE. along rd. from "23 RC"	1093.8
16.7 Treynor, 1.0 mi N. and 7.0 mi W. of, 7.0 mi N. and 3.0 mi W. of Mineola, 365 ft SW. along rd., thence 34 ft S. of center of rd., at N.-S. fence line, which is near cor. secs. 1, 2, 35 and 36; T. 74 and 75 N., R. 43 W.; 7 ft E. of a telephone pole, 1 ft N. of fence line, in concrete post; standard tablet stamped "23 RC 1955 1104"	1103.611

<u>Line 3 Cont'd.</u>	<u>Feet</u>
17.4 T. 74 N., R. 43 W.; near the center of sec. 2, center of rd., at T-rd. N.	1084.0
17.9 T. 74 N., R. 43 W.; near quarter corner between secs. 1 and 2, center of rd. at T-rd. S.	1202.0
18.3 T. 74 N., R. 43 W.; about 0.1 mi N. of cor. secs. 1, 2, 11 and 12, center of bridge; copper nail and washer	1108.4
18.8 Mineola, 5.5 mi N. and 3.0 mi W. of, 570 ft N. and 33 ft E. of T-fence W., which is near quarter corner between secs. 11 and 12, T. 74 N., R. 43 W.; 176 ft S. and 33 ft E. of the center of bridge, 3 ft N. of power pole, 1 ft W. of fence line, in concrete post; standard tablet stamped "24 RC 1955 1083.7"	1083.988
18.8 Reference mark; 176 ft N. and 33 ft W. of tablet, in center of bridge, copper nail and washer, 5.4 ft above water level 4/11/55, painted "RM"	1079.08
18.9 Center of rd. at T-fence W., 570 ft S. and 33 ft W. of "24 RC"	1110.3
19.1 T. 74 N., R. 43 W.; about 0.2 mi S. of quarter corner between secs. 11 and 12, rd. near crown of high hill at T-rd. E.	1201.1
19.4 T. 74 N., R. 43 W.; near cor. secs. 11, 12, 13 and 14, center of rd. at T-rd. N.	1102.0
19.5 Center of bridge, about 0.1 mi W. of cor. secs. 11, 12, 13 and 14, T. 74 N., R. 43 W.;	1090.4
19.9 T. 74 N., R. 43 W.; near quarter corner between secs. 11 and 14, center of rd. at N.-S. fence line	1078.5

LINE 4

GENERALLY NORTHWEST IN CENTER OF QUADRANGLE (by R. E. Carey, 1955; Book CV 676)

0.0 "L 97 1935" (USC&GS) (described in line 3)	1044.147
0.7 T. 73 N., R. 42 W.; near quarter corner between secs. 14 and 23, center of RR. crossing	1083.5
1.4 T. 73 N., R. 42 W.; on line between secs. 14 and 15, center of RR. at T-fence S.	1130.2
2.1 Center of RR. crossing, 72 ft S., thence 94 ft SE. along RR. from "52 RC"	1162.9
2.1 Silver City, 2.1 mi NW. of, along the Wabash RR., 2.3 mi SE. along Wabash RR. from Mineola, near quarter corner between secs. 10 and 15, T. 73 N., R. 42 W., 94 ft NW. along RR., thence 72 ft N. of RR. crossing, 26 ft S. of fence line on a small knoll, in concrete post; standard tablet stamped "52 RC 1955 1164"	1164.145
2.1 Reference mark; about 140 ft NNE. of tablet, 26 ft SW. of center of road in root on NE. side of a cluster of 6-in. box elder trees; copper nail and washer, painted "RM"	1163.39
3.0 T. 73 N., R. 42 W.; near quarter corner between secs. 9 and 10, center of RR. at E.-W. fence line	1104.5
3.5 T. 73 N., R. 42 W.; near quarter corner between secs. 4 and 9; center of RR. crossing	1069.5
4.1 T. 73 N., R. 42 W.; near cor. secs. 4, 5, 8 and 9; center of rd. at T-rd. N.	1038.8

<u>Line 4 Cont'd.</u>	<u>Feet</u>
4.4 At Mineola, Mills County, on the Wabash RR., 60 ft NE. of the NE. corner of the station, at a rd. crossing, 54 ft W. of the center of the rd., 39 ft N. of the center of the main track, 7 ft NW. of a pole and about 2 ft lower than the track. A standard USCGS disk stamped "J 97 1935" and set in the top of a concrete post	1024.772
0.9 T. 73 N., R. 42 W.; near the center of sec. 8, center of concrete bridge over Keg Creek, painted square	1022.9
1.2 T-rd. E., near quarter corner between secs. 7 and 8, T. 73 N., R. 42 W.	1046.8
1.7 Mineola, 1.0 mi S. and 1.0 mi W. of, near cor. secs. 7, 8, 17 and 18; T. 73 N., R. 42 W.; 31 ft S. and 271 ft W. from T-rd. W., 1.5 ft N. of fence, 5 ft W. of power pole; in concrete post; standard tablet stamped "1012 53 RC 1955"	1011.843
1.7 Reference mark; is 270 ft SW. of BM., 21 ft S. and 14 ft W. from center of N. end of bridge, on top of drift pin at N. end of W. steel span; painted square, painted "RM"	1012.51
2.3 About 200 ft W. of quarter corner between secs. 7 and 18, T. 73 N., R. 42 W.; near top of hill, center of rd. at drive to field N.; copper nail and washer	1096.8
2.4 T-rd. S., about 0.1 mi W. of quarter corner between secs 7 and 18, T. 73 N., R. 42 W.	1083.1
2.6 T. 73 N., R. 42 W.; about 0.25 mi E. of the W. cor. secs. 7 and 18, center of bridge; copper nail and washer	1051.4
3.0 T-rd. N., near E. 1/16 cor. between secs. 12 and 13, T. 73 N., R. 43 W.	1147.4
3.5 "3 RC 1955" (described in line 1)	1260.856

LINE 5

FROM A POINT NEAR CENTER OF EAST BORDER WEST TO NEAR CENTER OF QUADRANGLE (by R. E. Carey, 1955; Book CV 676)

1.6 T. 73 N., R. 41 W.; near quarter corner between secs. 1 and 12, center of road at T-fence N.	1141.4
2.1 T. 73 N., R. 41 W.; near cor. secs. 1, 2, 11 and 12, center of crossroads	1149.8
2.6 T. 73 N., R. 41 W.; near quarter corner between secs. 11 and 12, center of rd. at E.-W. fence line	1174.5
3.1 Silver City, 1.5 mi N. and 6.25 mi E. of, 102 ft N. and 39 ft E. of T-fence E. which is near cor. secs. 11, 12, 13 and 14; T. 73 N., R. 41 W.; 144 ft S. and 39 ft E. of private drive W. to Sun Rise Stock Farm, 1 ft W. of fence line, in concrete post; standard tablet stamped "90 RC 1955 1116"	1116.385
3.1 Reference mark; about 200 ft NW. of tablet, 19 ft W. of center of rd. on NW. corner of the N. end of concrete culvert; chiseled square, painted "RM"	1118.79
3.1 Center of rd. at T-fence E.; 102 ft S. and 39 ft W. of "90 RC"	1118.8
3.6 T. 73 N., R. 41 W.; near quarter corner between secs. 13 and 14, center of rd. at T-rd. W.	1118.7
4.1 T. 73 N., R. 41 W.; near the center of sec. 14, center of bridge; copper nail and washer	1056.7

10
Glenwood Quadrangle
63 - Iowa

Line 5 Cont'd.

	<u>Feet</u>
4.6 T. 73 N., R. 41 W.; near quarter corner between secs. 14 and 15, center of rd. at T-rd. E.	1173.0
5.1 T. 73 N., R. 41 W.; near cor. secs. 10, 11, 14 and 15, center of rd. at T-rd. W.	1106.9
5.4 Center of bridge, near E.1/16 cor. between secs. 10 and 15, T. 73 N., R. 41 W.	1086.4
5.6 T. 73 N., R. 41 W.; near quarter corner between secs. 10 and 15, center of rd. at T-fence N.	1110.8
6.2 Center of rd. at T-rd. N., 25 ft N. and 167 ft E. of "91 RC"	1223.5
6.2 Silver City, 1.5 mi N. and 4.25 mi E. of, 25 ft S. and 167 ft W. of T-rd. N., which is near cor. secs. 9, 10, 15 and 16; T. 73 N., R. 41 W.; 2 ft N. and 2 ft E. of corner post of Corral fence S., at the NE. end of a grove of mulberry trees, in concrete post; standard tablet stamped "91 RC 1955 1227"	1227.096
6.2 Reference mark; about 280 ft W. of tablet, 30 ft S. of center of rd., in root on N. side of a 6-in. mulberry tree; copper nail and washer	1226.10
6.6 T. 73 N., R. 41 W.; near quarter corner between secs. 9 and 16, center of rd. at N.-S. fence line	1170.4
7.1 T. 73 N., R. 41 W., near cor. secs. 8, 9, 16 and 17, center of crossroads at P.I. of curve	1203.5
7.8 T. 73 N., R. 41 W.; near quarter corner between secs. 8 and 17, center of rd. at drain	1094.5
8.1 T. 73 N., R. 41 W.; near cor. secs. 7, 8, 17 and 18, center of rd. at T-fence S.	1175.5
8.6 Silver City, 1.5 mi N. and 1.75 mi E. of, near quarter corner between secs. 7 and 18, T. 73 N., R. 41 W.; 35 ft S. and 320 ft W. of rd. at drain, 35 ft S. and 250 ft E. of private drive N., 35 ft S. and 73 ft E. of rd. at T-fence S., 2 ft E. of a telephone pole, 1 ft N. of fence line, in concrete post; standard tablet stamped "92 RC 1955 1140"	1139.711
8.6 Reference mark; 15 ft N. and 310 ft E. of tablet, 20 ft S. and 3.5 ft lower than center of rd., on the NW. corner of the SW. end of concrete culvert; chiseled square, painted "RMP"	1130.40
9.1 T. 73 N., Rs. 41 and 42 W., near cor. secs. 7, 12, 13 and 18, center of crossroads	1191.1
10.0 T. 73 N., R. 42 W.; about 0.15 mi E. cor. secs. 11, 12, 13 and 14, center of bridge over Silver Creek; copper nail and washer	1043.4
10.9 "16 RC 1955 " (described in line 3)	1066.178