

2001
Floyd, Chickasaw & Howard Counties, Iowa
Iowa North Zone (1401)
NAD_83(1996)

Point Number: **409**

Northing: **4004537.75**(Ft) Easting: **5234758.80**(Ft)

Northing: **1220585.548**(M) Easting: **1595557.675**(M)

Elev: **1248.25**(Ft) NAVD_88

Elev: **380.465**(M) NAVD_88 Ellip Ht: **350.305**(M) 96C Geoid Ht: **-30.160**(M)

Latitude: **43-28-47.16141** N Longitude: **92-19-07.99281** W



Theta: **0-48-01.77** Combination Factor: **0.99999093**

Designation: **HOWARD CO GPS CONTROL PT 2000-409**

Monument Type: 5/8" dia driven aluminum rod with a 2-1/2" dia aluminum cap and permanent magnet encased in a 5" dia PVC pipe with an aluminum access cover.

To Reach: 0.7 mi W of May Ave, 30ft N of 25th St., near the E 1/4 Cor of Sec 13 T100N R13W.

Date Printed January 17, 2001

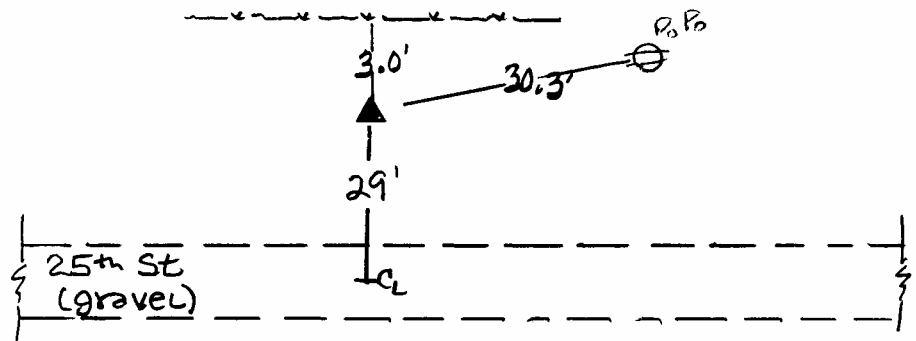

Set NGS style rod monument with aluminum access cover.

approx 0.37 mile to Lincoln Av

