LAND CORNERS AND HORIZONTAL CONTROL POINTS

DATE 3-7-90 M. J. HARDEN ASSOC., INC. A.P.I. JOB NO _____

M.J.H. JOB NO. 6805-00C

POINT NAME OR DESIGNATION GPS-13

POINT NO. _____, SEC. 33, T 78, R 23.

ESTABLISHED BY: M.J. HARDEN ASSOC. DATE: APRIL 1987

RECOVERED BY: _____ DATE: _____

COORDINATES: N 550114.546, E 1637579.651 (NAD 1983)
(IOWA STATE PLANE COORDINATE SYSTEM, SOUTH ZONE)

COORDINATES: N _____, E _____
(_____ STATE PLANE MODIFIED GRID COORDINATE SYSTEM _____ ZONE

COORDINATES: N _____, E _____
(INDEPENDENT GRID COORDINATE SYSTEM)

ELEVATION FACTOR _____ SCALE FACTOR _____

COMBINED ADJUSTMENT FACTOR _____

REF. PT.	AZIMUTH	DISTANCE	REFERENCES
No. 1	S.E.	50.90'	"X" NAILS IN N.W. FACE OF POWER POLE
No. 2	S.S.W.	55.55'	"X" CUT IN TOP OF S. END OF 24" R.C.P.
No. 3	S.W.	71.45'	"X" NAILS IN TOP OF 6" DIA. CORNER POST
No. 4	W.S.W.	30.90'	HINGE NAIL IN TOP OF N. END OF 24" R.C.P.
No. 5	W.	24.90'	"X" NAILS IN S. FACE OF CORNER FENCE POST
No. 6	N.W.	26.05'	"X" NAILS IN E. FACE OF BRACE FENCE POST

DESCRIPTION

MARK: 1¼" SQUARE BOLT

LOCATION: 1" BELOW ASPH. CONC. SURFACE OF 52ND ST. WHERE GRAVEL SURFACE BEGINS

S. ¼ COR. 33-78-23
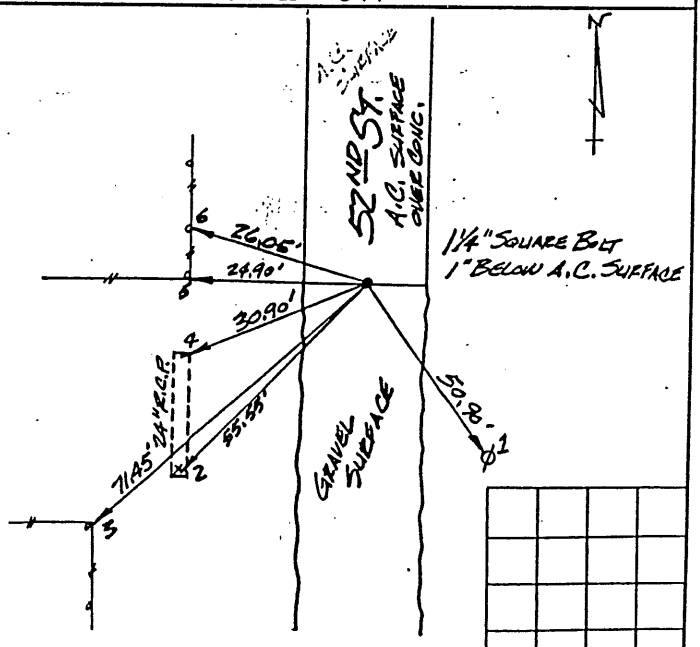
SKETCH